



 Clean water

 Domestic use

 Civil use

 Agricultural use

PERFORMANCE RANGE

- Flow rate up to **180 l/min** (10.8 m³/h)
- Head up to **97 m**

INSTALLATION AND USE

A series of multi-impeller submersible pumps engineered for enhanced reliability, thanks to innovative patented solutions that prevent stalling even after prolonged periods of inactivity.

Highly efficient and reliable, these pumps are ideal for various applications, including water distribution in domestic, civil, and agricultural settings, particularly for water distribution in conjunction with pressure tanks, for irrigation, pressure boosting, and more.

APPLICATION LIMITS


- Liquid temperature up to **+40 °C**
- Maximum sand content **150 g/m³**
- Maximum operating depth below water level up to **20 m** (with an appropriately sized power cable)
- Vertical and horizontal operation

INCLUDES

- ※ Float switch (exclusive to single-phase models)
- ※ Power cable length **10 m**

AVAILABLE UPON REQUEST

- ※ Pumps without float switch
- ※ **20 m** or **30 m** power cables
- ※ Different voltage requirements 60 Hz frequency
- ※ **Support kit for horizontal operation**

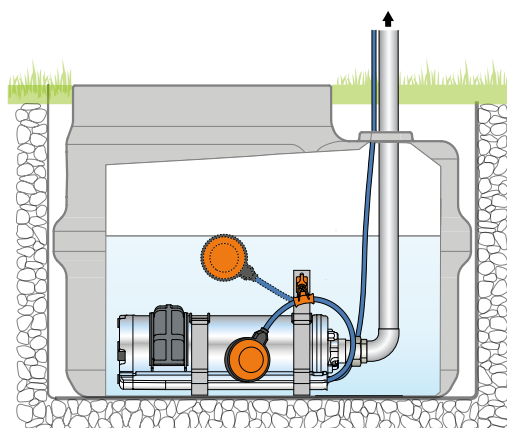


PATENTS - TRADE MARKS - MODELS

- Patent No. IT0001428923
- Patent No. EP2419642

CURVES AND PERFORMANCE DATA

50 Hz

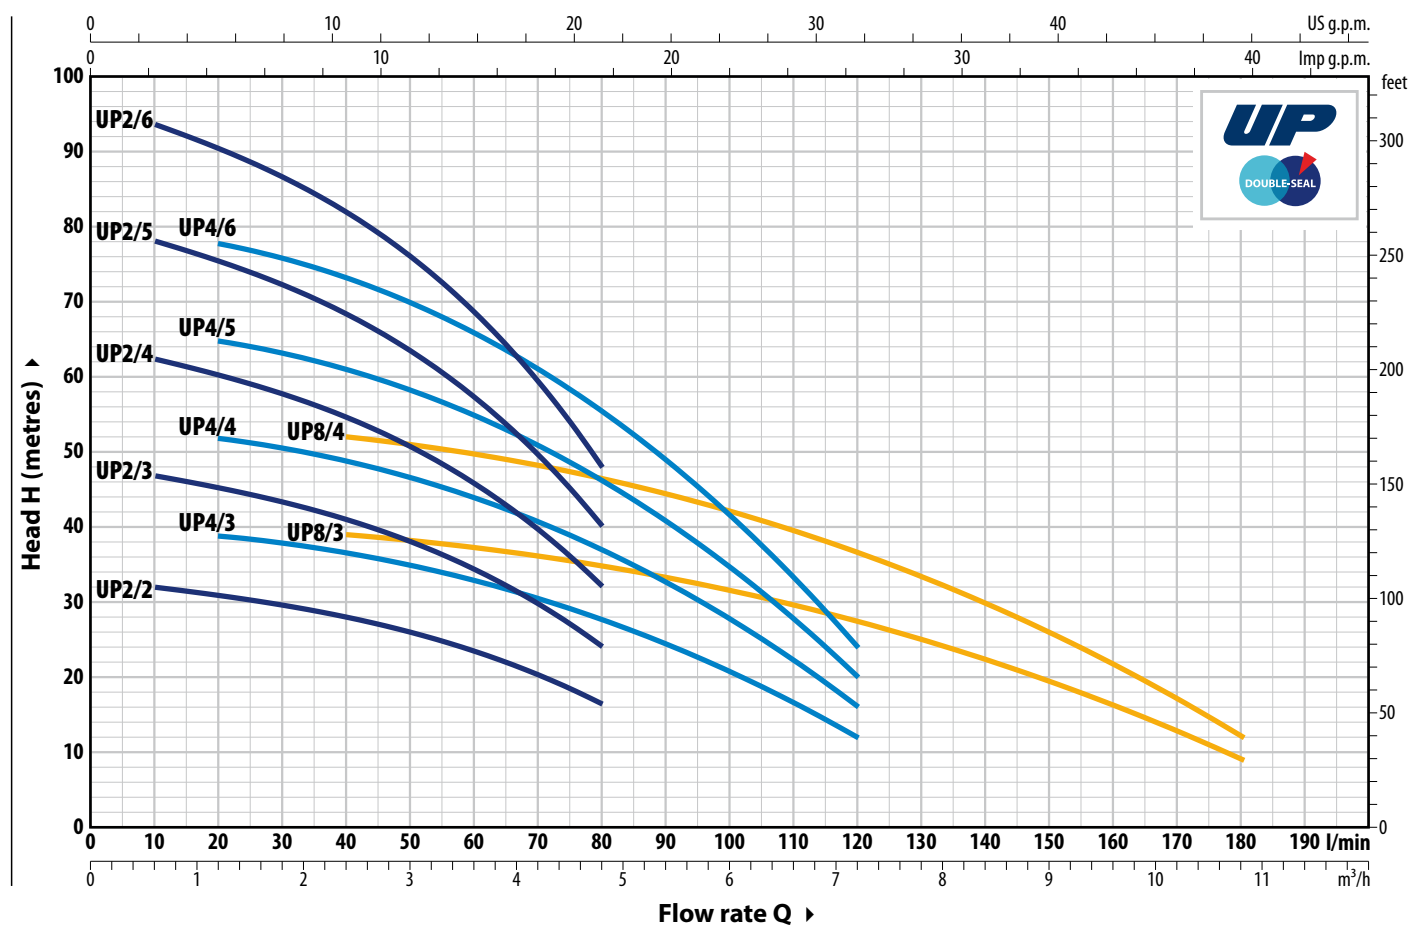

| TYPE | | POWER (P ₂) | | Q | m³/h | | | | | | | | | | | | |
|--------------|-------------|-------------------------|------|----------|------|------|------|------|------|------|------|------|------|------|------|--|--|
| Single-phase | Three-phase | kW | HP | | 0 | 0.6 | 1.2 | 2.4 | 3.6 | 4.8 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | | |
| UPm 2/2-GE | – | 0.37 | 0.5 | H metres | 0 | 10 | 20 | 40 | 60 | 80 | 100 | 120 | 140 | 160 | 180 | | |
| UPm 2/3-GE | UP 2/3 | 0.55 | 0.75 | | 33 | 32 | 31 | 28 | 23.5 | 16.4 | | | | | | | |
| UPm 2/4-GE | UP 2/4 | 0.75 | 1 | | 48.5 | 47 | 45 | 41 | 34.5 | 24 | | | | | | | |
| UPm 2/5-GE | UP 2/5 | 1.1 | 1.5 | | 64.5 | 62.5 | 60.5 | 54.5 | 46 | 32 | | | | | | | |
| UPm 2/6-GE | UP 2/6 | 1.5 | 2 | | 80 | 78 | 75 | 68.5 | 57 | 40 | | | | | | | |
| UPm 4/3-GE | UP 4/3 | 0.55 | 0.75 | | 97 | 94 | 90 | 82 | 68.5 | 48 | | | | | | | |
| UPm 4/4-GE | UP 4/4 | 0.75 | 1 | | 40 | – | 39 | 36.5 | 33 | 28 | 20.8 | 12 | | | | | |
| UPm 4/5-GE | UP 4/5 | 1.1 | 1.5 | | 53 | – | 52 | 49 | 44 | 37 | 28 | 16 | | | | | |
| UPm 4/6-GE | UP 4/6 | 1.5 | 2 | | 67 | – | 65 | 61 | 55 | 46.5 | 34.5 | 20 | | | | | |
| UPm 8/3-GE | UP 8/3 | 1.1 | 1.5 | | 80 | – | 78 | 73 | 66 | 55.5 | 41.5 | 24 | | | | | |
| UPm 8/4-GE | UP 8/4 | 1.5 | 2 | | 40.5 | – | – | 39 | 37.5 | 35 | 31.5 | 27.5 | 22.3 | 16.2 | 9 | | |
| | | | | | 54 | – | – | 52 | 49.5 | 46.5 | 42 | 36.5 | 29.5 | 21.6 | 12 | | |

Q = Flow rate H = Total manometric head

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.


➡ On request single-phase pumps without float switch

ABSORPTION


| TYPE | VOLTAGE |
|--------------|---------|
| Single-phase | 230 V |
| UPm 2/2-GE | 4.4 A |
| UPm 2/3-GE | 5.4 A |
| UPm 2/4-GE | 6.2 A |
| UPm 2/5-GE | 7.6 A |
| UPm 2/6-GE | 8.8 A |
| UPm 4/3-GE | 5.0 A |
| UPm 4/4-GE | 6.2 A |
| UPm 4/5-GE | 7.2 A |
| UPm 4/6-GE | 8.7 A |
| UPm 8/3-GE | 6.8 A |
| UPm 8/4-GE | 8.5 A |

| TYPE | VOLTAGE |
|-------------|---------|
| Three-phase | 400 V |
| UP 2/3 | 1.9 A |
| UP 2/4 | 2.3 A |
| UP 2/5 | 2.9 A |
| UP 2/6 | 3.3 A |
| UP 4/3 | 1.8 A |
| UP 4/4 | 2.2 A |
| UP 4/5 | 2.8 A |
| UP 4/6 | 3.2 A |
| UP 8/3 | 2.7 A |
| UP 8/4 | 3.3 A |


DIMENSIONS AND WEIGHT

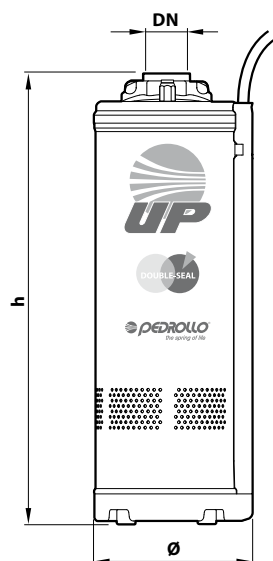

※ VERTICAL INSTALLATION

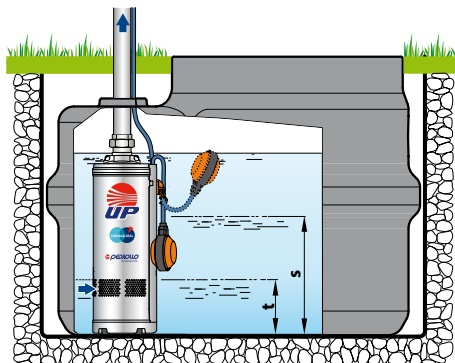

※ HORIZONTAL INSTALLATION

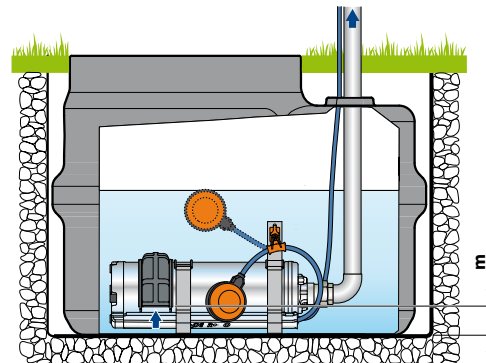

| TYPE | | PORT DN | DIMENSIONS mm | | kg | |
|--------------|-------------|------------|---------------|-----|------|------|
| Single-phase | Three-phase | | Ø | h | 1~ | 3~ |
| UPm 2/2-GE | – | 1 1/4" | 150 | 384 | 12.8 | 12.5 |
| UPm 2/3-GE | UP 2/3 | | | 411 | 13.1 | 13.3 |
| UPm 2/4-GE | UP 2/4 | | | 468 | 14.9 | 14.0 |
| UPm 2/5-GE | UP 2/5 | | | 495 | 16.5 | 15.3 |
| UPm 2/6-GE | UP 2/6 | | | 542 | 18.0 | 16.7 |
| UPm 4/3-GE | UP 4/3 | | | 411 | 13.2 | 12.9 |
| UPm 4/4-GE | UP 4/4 | | | 468 | 14.8 | 13.4 |
| UPm 4/5-GE | UP 4/5 | | | 495 | 16.4 | 15.3 |
| UPm 4/6-GE | UP 4/6 | | | 542 | 18.1 | 16.9 |
| UPm 8/3-GE | UP 8/3 | | | 441 | 15.2 | 14.2 |
| UPm 8/4-GE | UP 8/4 | | | 488 | 17.0 | 15.8 |

| TYPE | LEVELS mm | | |
|--|-----------|-----|----|
| | s | t | m |
| UP 2/2 UP 2/3 UP 4/3 | 310 | 113 | 55 |
| UP 2/4 UP 2/5 UP 4/4 UP 4/5 UP 8/3 | 340 | | |
| UP 2/6 UP 4/6 UP 8/4 | 360 | | |

s = Minimum restart level
t = Draining capability
m = Minimum operating level

PALLET CAPACITY

| TYPE | | NO. OF PUMPS |
|--------------|-------------|--------------|
| Single-phase | Three-phase | |
| UPm 2/2-GE | – | 30 |
| UPm 2/3-GE | UP 2/3 | 30 |
| UPm 2/4-GE | UP 2/4 | 30 |
| UPm 2/5-GE | UP 2/5 | 25 |
| UPm 2/6-GE | UP 2/6 | 25 |
| UPm 4/3-GE | UP 4/3 | 30 |
| UPm 4/4-GE | UP 4/4 | 30 |
| UPm 4/5-GE | UP 4/5 | 25 |
| UPm 4/6-GE | UP 4/6 | 25 |
| UPm 8/3-GE | UP 8/3 | 30 |
| UPm 8/4-GE | UP 8/4 | 30 |

MATERIALS AND COMPONENTS

1 Outer sleeve **AISI 304** stainless steel with ISO 228/1 threaded delivery port

2 Internal motor jacket Stainless steel **AISI 304**

3 Impellers and diffusers Noryl™

4 Diaphragms Stainless steel **AISI 304**

5 Motor shaft Stainless steel **AISI 431**

6 Double mechanical seal with interposed oil chamber

| Seal | Shaft | Location | Materials |
|---------------|---------|------------|----------------------------------|
| STA-17 | Ø 17 mm | Motor side | Ceramic / Graphite / NBR |
| ST1-16 | Ø 16 mm | Pump side | Silicon carbide / Graphite / NBR |

7 Capacitor

8 Electric motor

UPm: single-phase 230 V - 50 Hz with winding integrated thermal motor protection

UP: three-phase 400 V - 50 Hz

- Continuous running duty S1
- Insulation: Class F
- Protection rating: IP X8

9 Power cord

➡ **DRINCABLE®** type
approved for use in drinking water by **WRAS**
according to BS 6920, approval no. 7513
※ Standard length 10 metres

10 Automatic vent valve

11 Anti-vibration feet

12 Float switch
(exclusive to single-phase models)

