FG EN 733" standardised centrifugal pumps

Clean water
Civil use
Industrial use
Agricultural use

PERFORMANCE RANGE

- Flow rate up to **5750 l/min** (345 m³/h)
- Head up to **98 m**

INSTALLATION AND USE

Standardized centrifugal pumps equipped with a support structure and built according to EN733 standard.

Designed to transfer clean water free from abrasive particles and liquids that will not damage the pump's components.

- **Water supply**
- **Pressurization**
- **Irrigation**
- **Firefighting systems**
- **Industrial applications**
- **Agriculture applications**
- **Civil, industrial, and agricultural applications**
- **Air conditioning, cooling, heating, and circulation systems**

APPLICATION LIMITS

- Manometric suction head up to **7 m**
- Liquid temperature between **-10 °C** and **+90 °C**
- Maximum pressure in the pump body **10 bar** (PN10)

AVAILABLE UPON REQUEST

※ Mechanical seal options available
※ Pumps for motors with 60 Hz frequency
※ Handling of liquids with higher or lower temperatures
※ Adaptability to operate in high or low temperature environments

※ Counterflange KIT including screws, nuts and gaskets

PERFORMANCE RANGE – n= 3450 min^{-1}

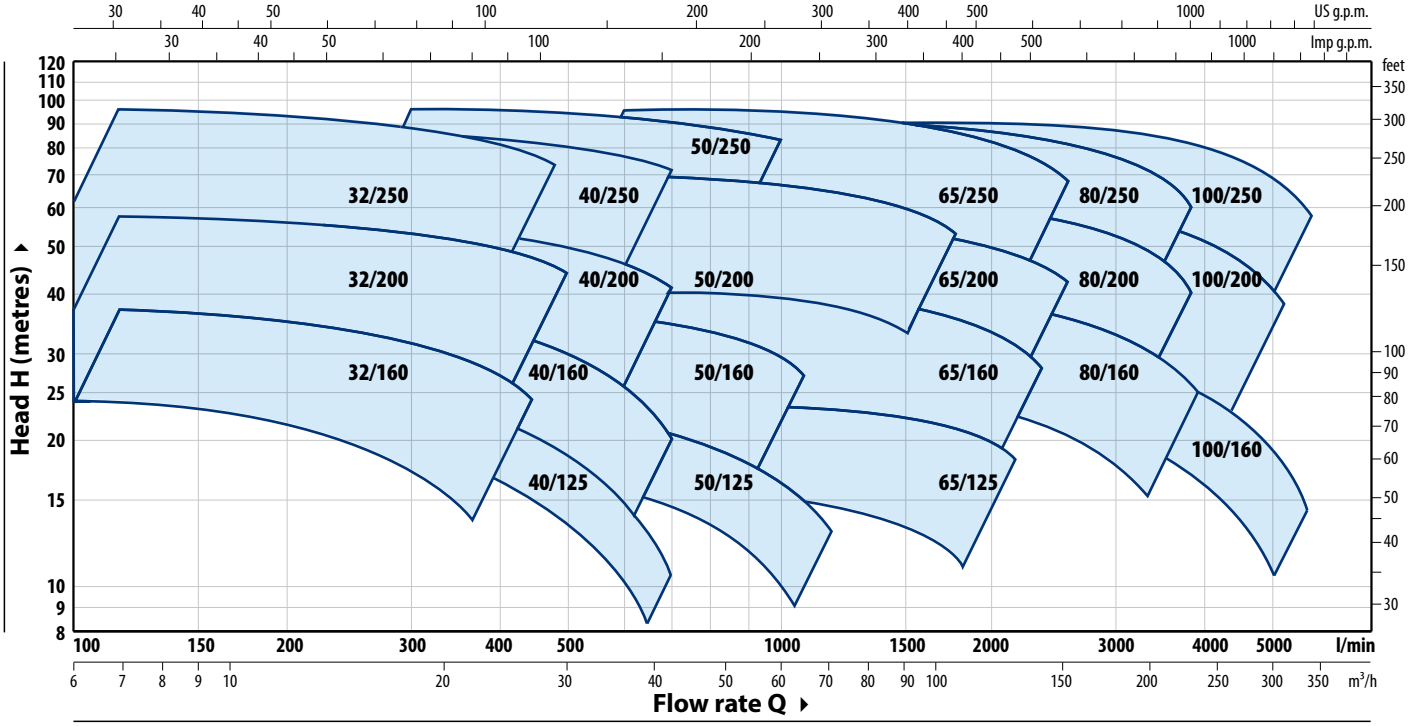

PERFORMANCE DATA – n= 3450 min^{-1}

TYPE	MOTOR TO BE COUPLED		PERFORMANCE n= 3450 min^{-1}	
	kW	HP	Q m³/h	H m
FG2-32/160C	1.5	2	6 – 21	24 – 14
FG2-32/160B	2.2	3	6 – 24	30 – 17
FG2-32/160A	3	4	6 – 27	37 – 24
FG2-32/200C	4	5.5	6 – 27	44 – 31.5
FG2-32/200B	5.5	7.5	6 – 30	51 – 36
FG2-32/200A	7.5	10	6 – 30	57 – 44
FG2-32/200BH	3	4	6 – 18	45 – 37
FG2-32/200AH	4	5.5	6 – 19.2	55 – 44
FG2-32/250C	9.2	12.5	6 – 27	75 – 60
FG2-32/250B	11	15	6 – 30	87 – 70
FG2-32/250A	15	20	6 – 30	97 – 80
FG2-40/125C	1.1	1.5	6 – 33	16 – 6
FG2-40/125B	1.5	2	6 – 36	20.5 – 9
FG2-40/125A	2.2	3	6 – 42	26 – 10
FG2-40/160C	2.2	3	6 – 36	27 – 14
FG2-40/160B	3	4	6 – 36	32 – 20
FG2-40/160A	4	5.5	6 – 42	38 – 20
FG2-40/200B	5.5	7.5	6 – 42	47 – 28
FG2-40/200A	7.5	10	6 – 42	55 – 41
FG2-40/250C	9.2	12.5	6 – 42	64 – 47
FG2-40/250B	11	15	6 – 42	71 – 55
FG2-40/250A	15	20	6 – 42	88 – 72
FG2-50/125C	2.2	3	18 – 72	17.5 – 6
FG2-50/125B	3	4	18 – 72	20.7 – 9
FG2-50/125A	4	5.5	18 – 72	23.5 – 13
FG2-50/160C	4	5.5	18 – 60	27 – 16
FG2-50/160B	5.5	7.5	18 – 72	32 – 18
FG2-50/160A	7.5	10	18 – 81	37 – 20
FG2-50/200C	11	15	24 – 102	44 – 30
FG2-50/200B	15	20	24 – 102	52 – 38
FG2-50/200A	18.5	25	24 – 108	61 – 45
FG2-50/200AR	22	30	24 – 108	69 – 53
FG2-50/250D	9.2	12.5	18 – 54	51 – 37
FG2-50/250C	11	15	18 – 60	59 – 43
FG2-50/250B	15	20	18 – 60	72 – 59
FG2-50/250A	18.5	25	18 – 60	85 – 73
FG2-50/250AR	22	30	18 – 60	95 – 83

TYPE	MOTOR TO BE COUPLED		PERFORMANCE n= 3450 min^{-1}	
	kW	HP	Q m³/h	H m
FG2-65/125C	4	5.5	36 – 108	16 – 11
FG2-65/125B	5.5	7.5	36 – 120	18 – 13
FG2-65/125A	7.5	10	36 – 132	23 – 18
FG2-65/160C	9.2	12.5	36 – 132	32 – 22
FG2-65/160B	11	15	36 – 144	36.5 – 23
FG2-65/160A	15	20	36 – 144	40.5 – 28
FG2-65/200B	15	20	12 – 144	44 – 30.5
FG2-65/200A	18.5	25	12 – 150	50 – 36.5
FG2-65/200AR	22	30	12 – 156	57 – 42
FG2-65/250C	30	40	24 – 141	76 – 53
FG2-65/250B	37	50	24 – 150	87 – 62
FG2-65/250A	45	60	24 – 156	95 – 68
FG2-80/160D	11	15	30 – 240	25 – 10
FG2-80/160C	15	20	30 – 240	30 – 15
FG2-80/160B	18.5	25	30 – 240	35 – 20
FG2-80/160A	22	30	30 – 240	40 – 25
FG2-80/200B	30	40	30 – 219	56 – 34.5
FG2-80/200A	37	50	30 – 234	62 – 40
FG2-80/250B	45	60	36 – 216	77 – 54
FG2-80/250A	55	75	36 – 234	88.5 – 60
FG2-100/160A	22	30	60 – 330	38 – 17.5
FG2-100/200C	30	40	48 – 279	51 – 28
FG2-100/200B	37	50	48 – 294	57 – 33
FG2-100/200A	45	60	48 – 315	63 – 38
FG2-100/250B	55	75	48 – 309	75 – 48
FG2-100/250A	75	100	48 – 345	89 – 58

Q = Flow Rate

H = Total manometric head

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

FG2

CHARACTERISTIC CURVES

n= 3450 min^{-1}

FG2-32/160

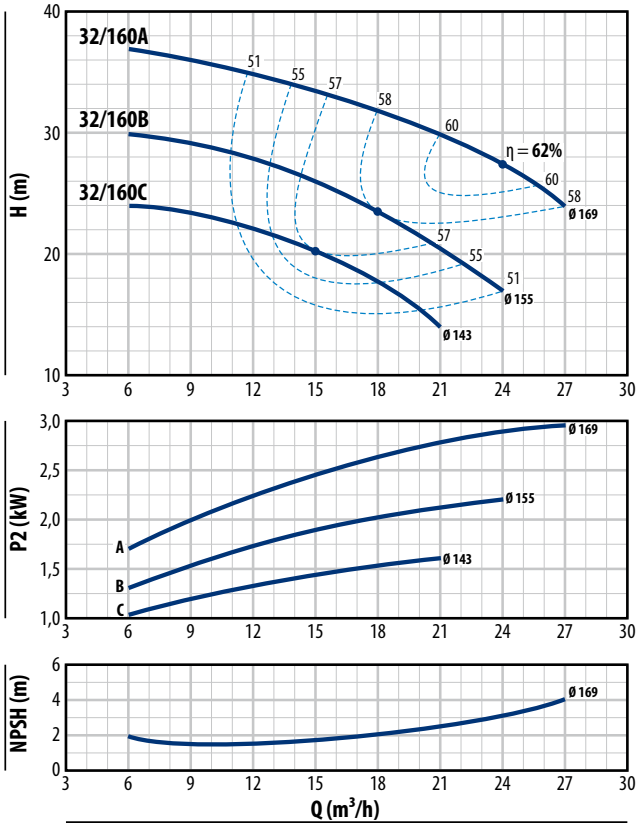

FG2-32/200

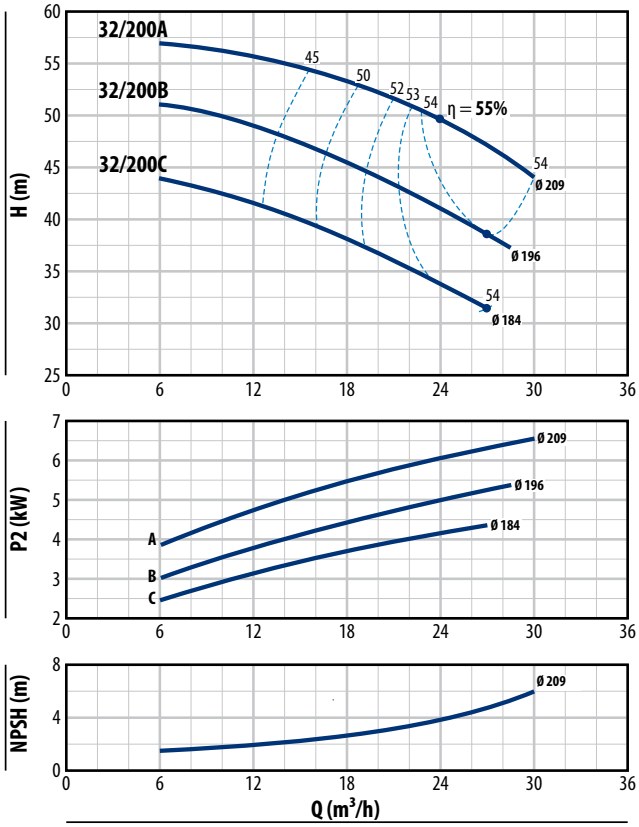

FG2-32/200H

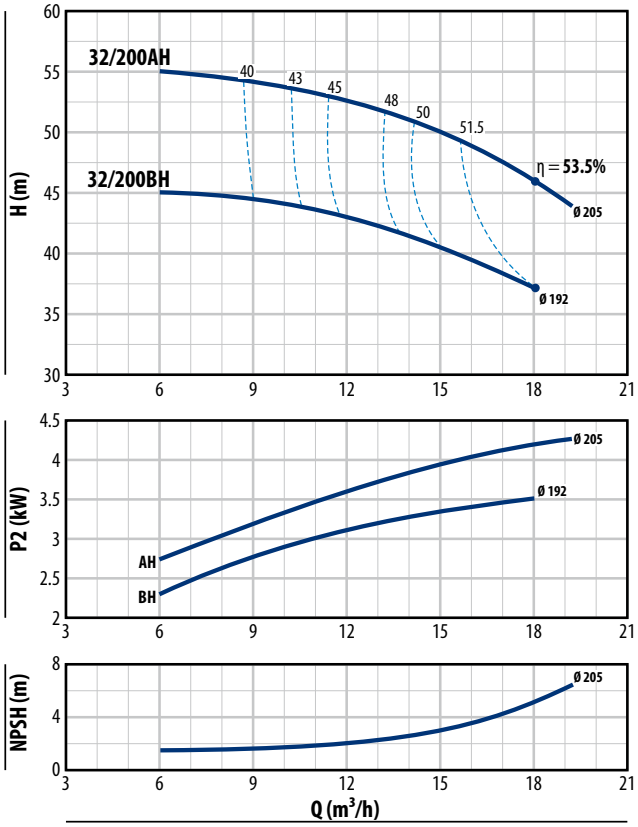

FG2-32/250

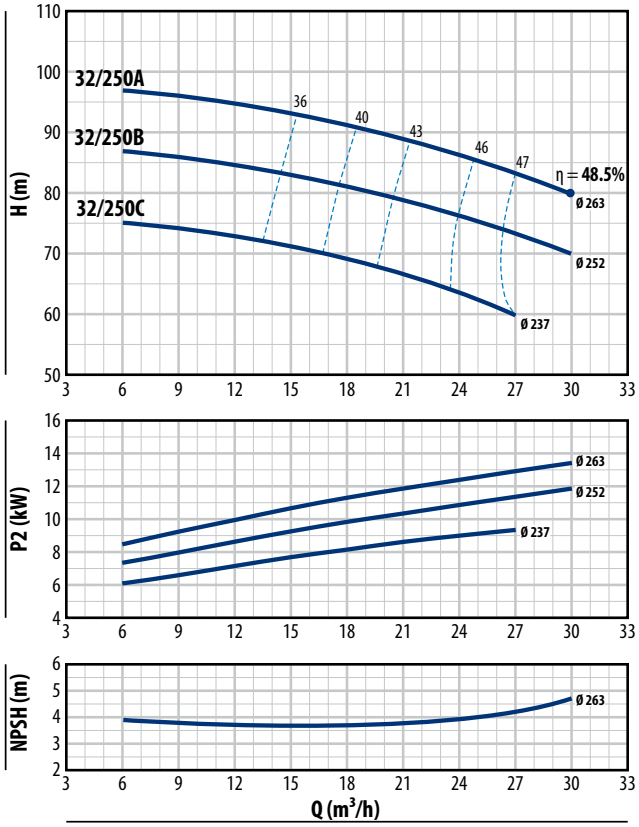

CHARACTERISTIC CURVES

n= 3450 min^{-1}

FG2-40/125

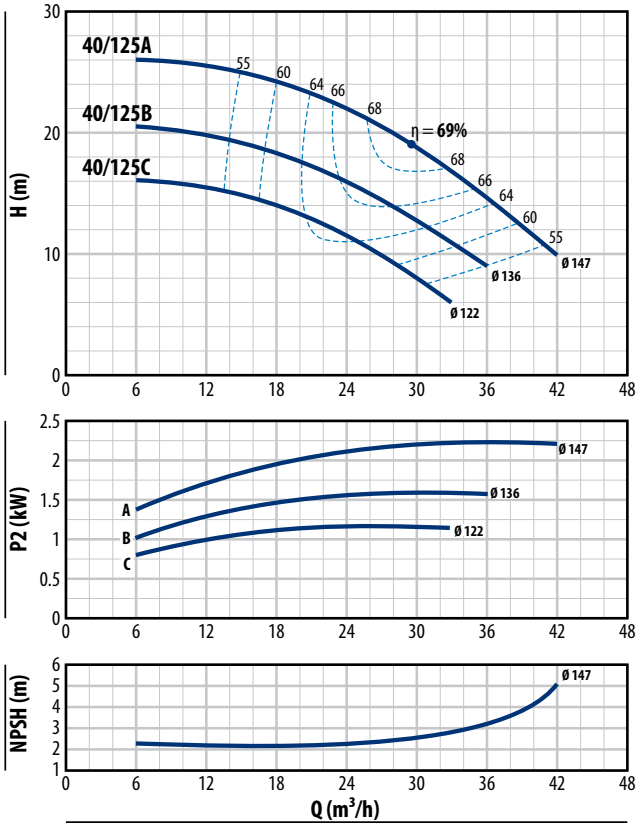

FG2-40/160

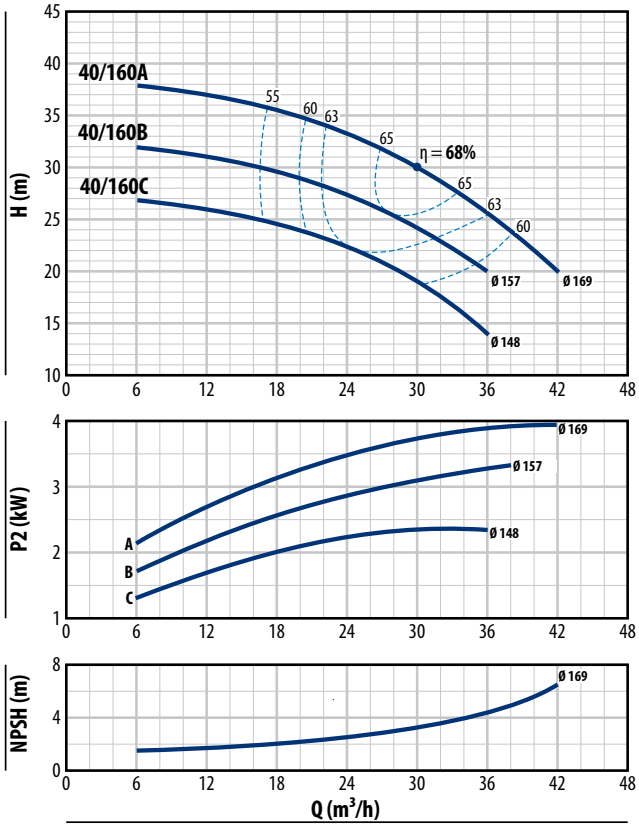

FG2-40/200

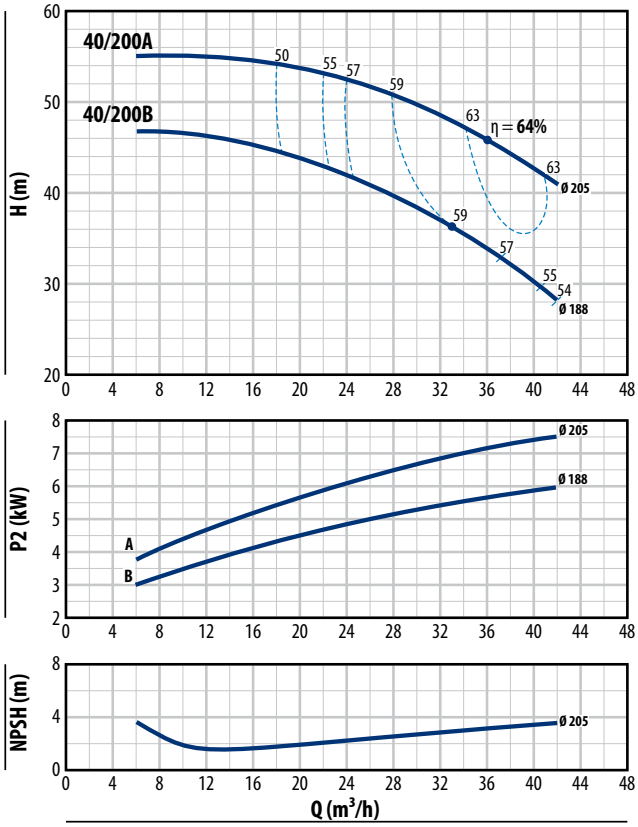

FG2-40/250

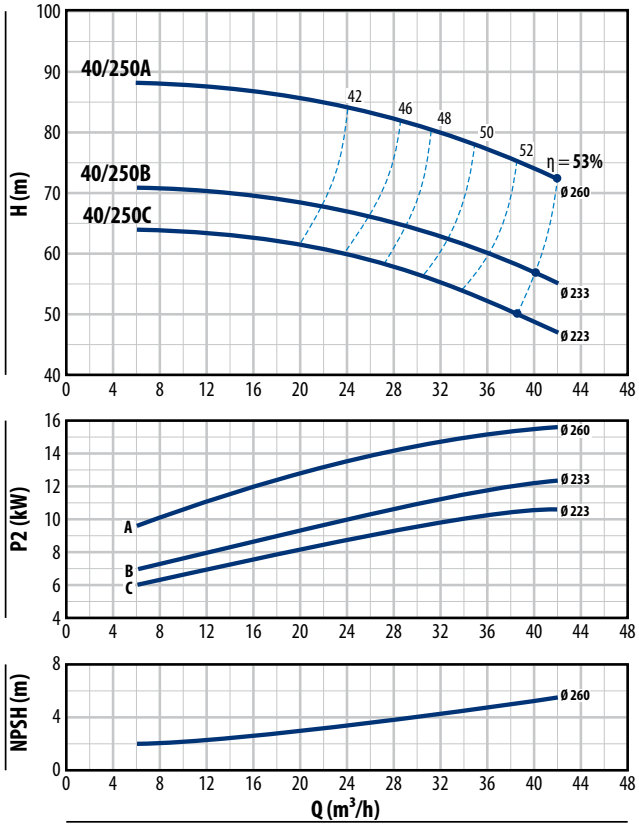

CHARACTERISTIC CURVES

n= 3450 min^{-1}

FG2-50/125

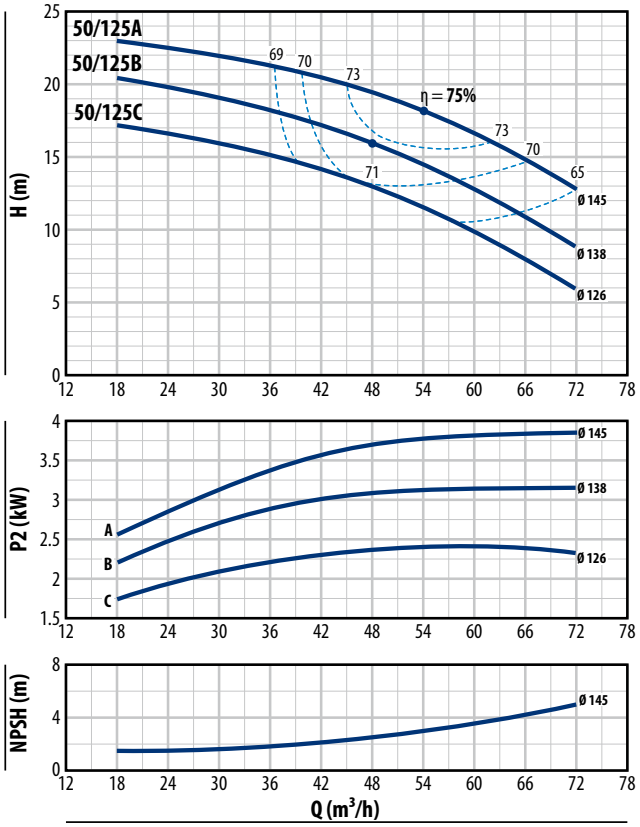

FG2-50/160

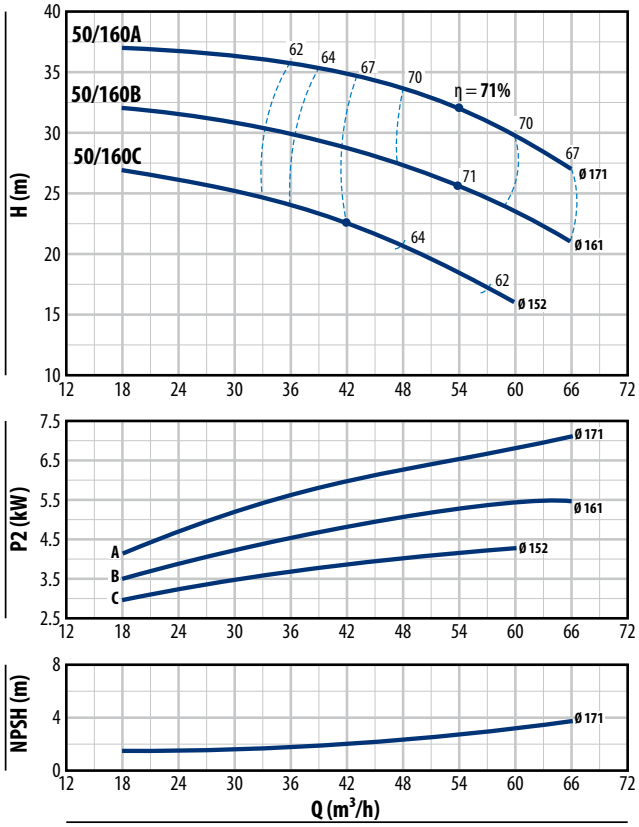

FG2-50/200

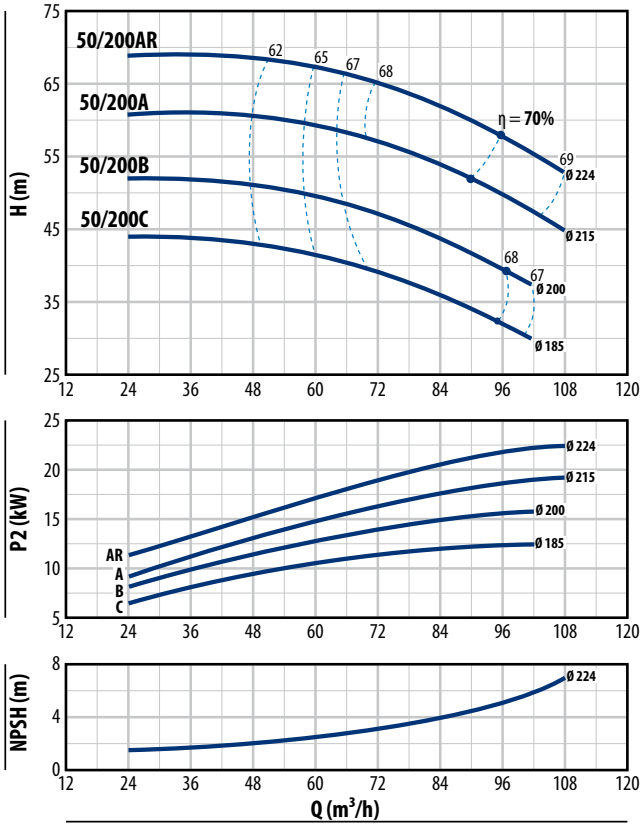

FG2-50/250

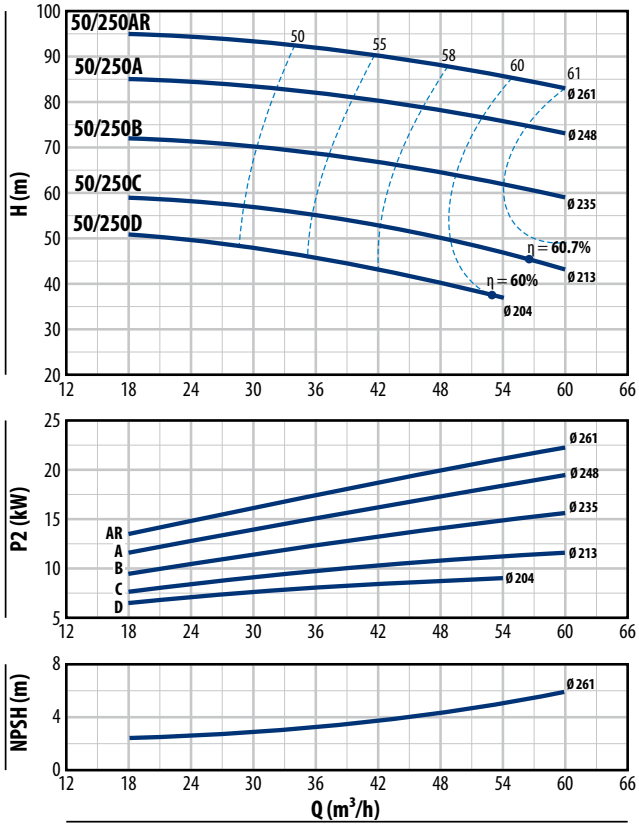

CHARACTERISTIC CURVES

n= 3450 min^{-1}

FG2-65/125

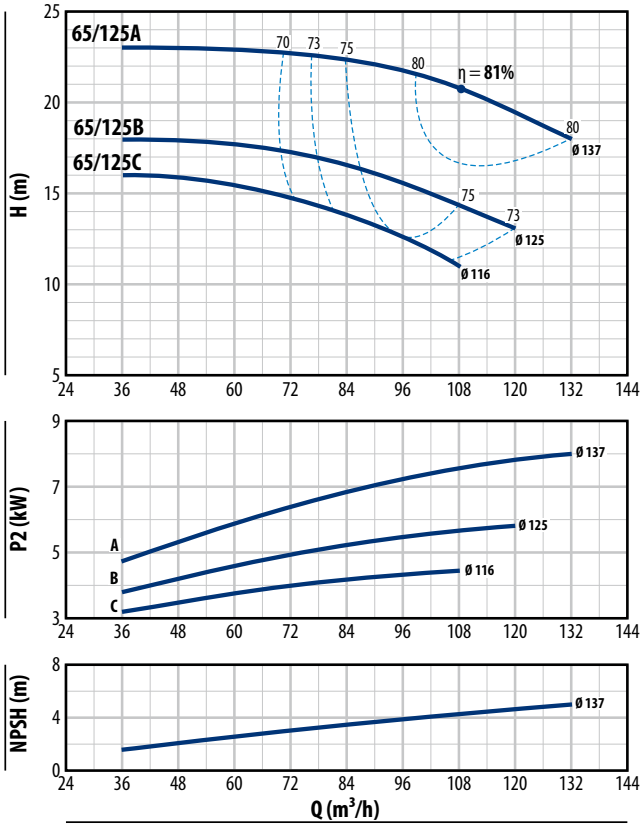

FG2-65/160

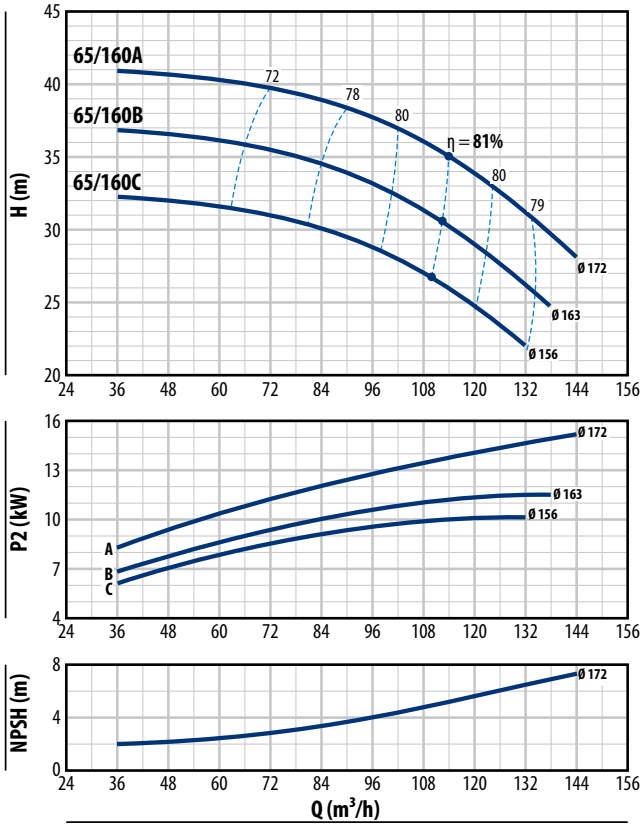

FG2-65/200

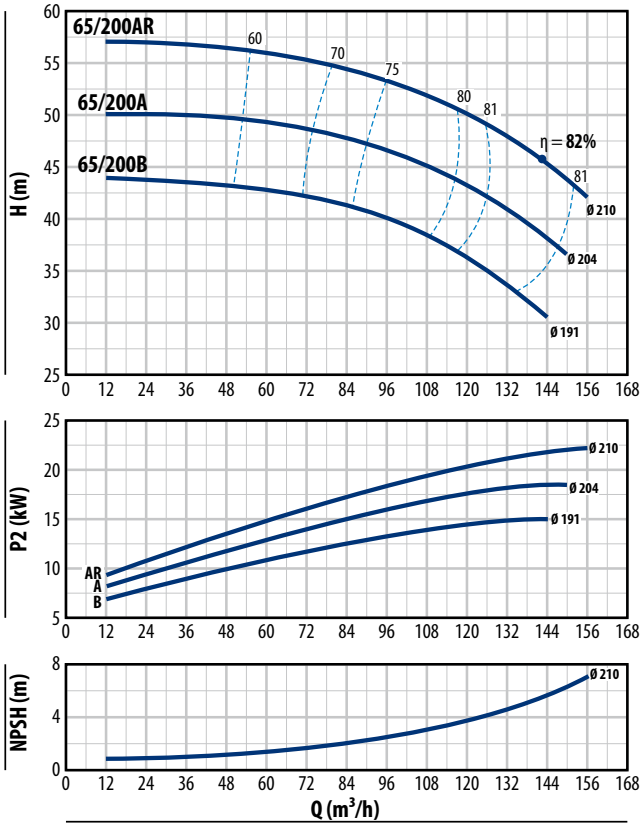

FG2-65/250

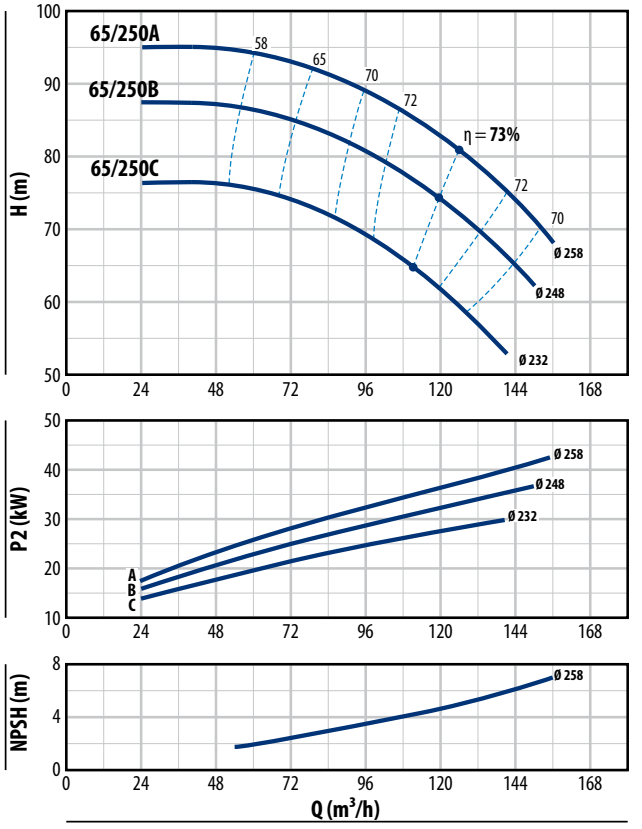

CHARACTERISTIC CURVES

n= 3450 min^{-1}

FG2-80/160

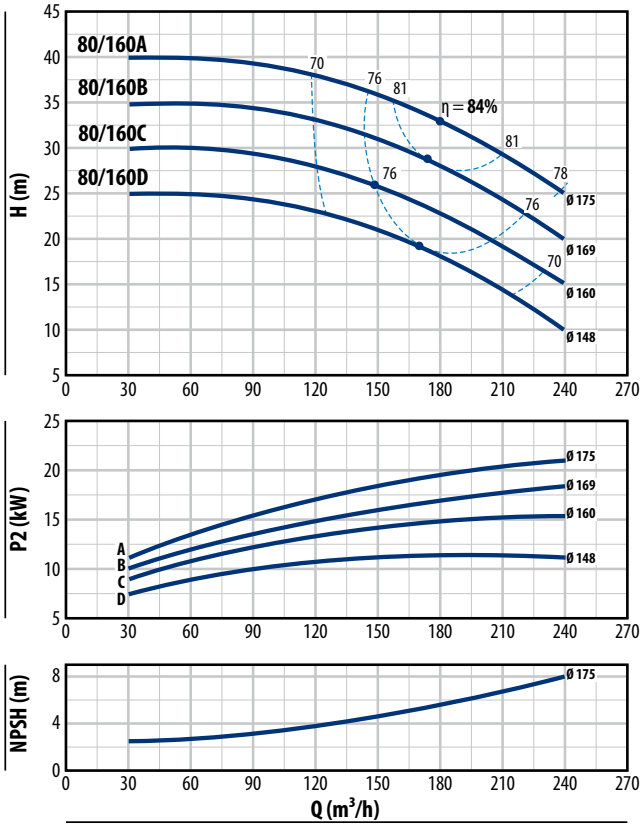

FG2-80/200

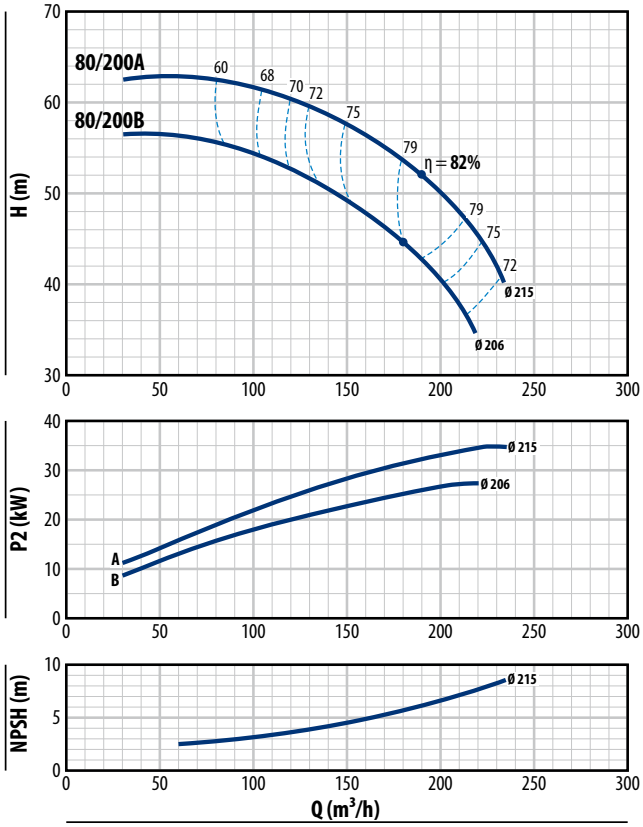

FG2-80/250

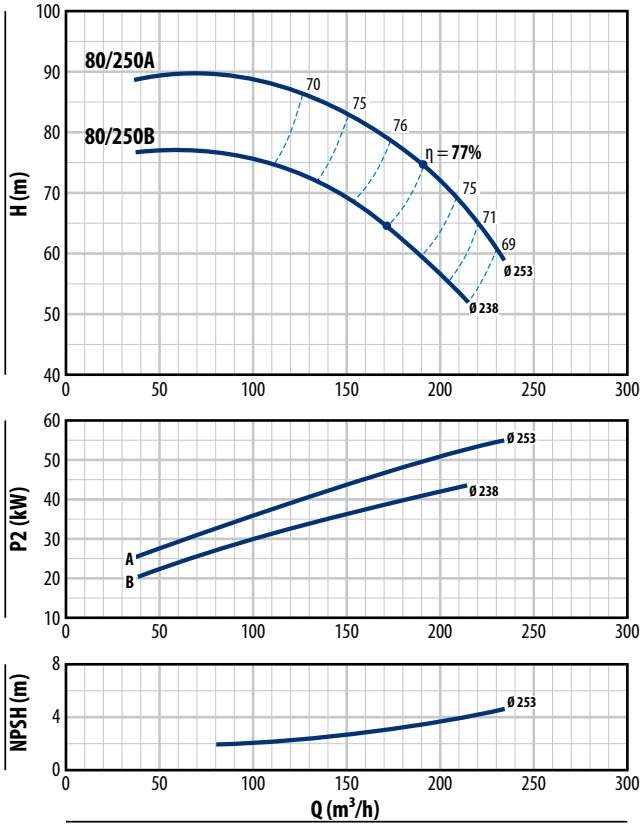

CHARACTERISTIC CURVES

n= 3450 min^{-1}

FG2-100/160

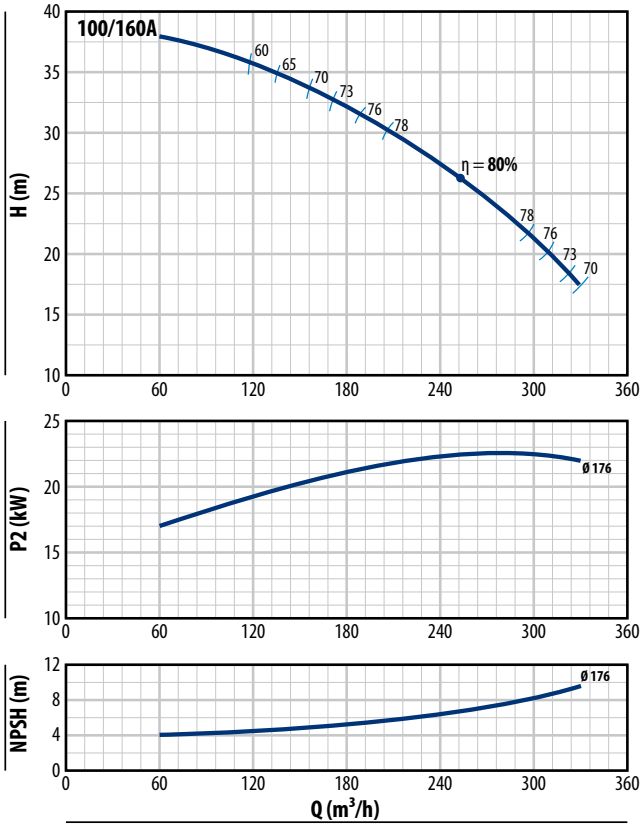

FG2-100/200

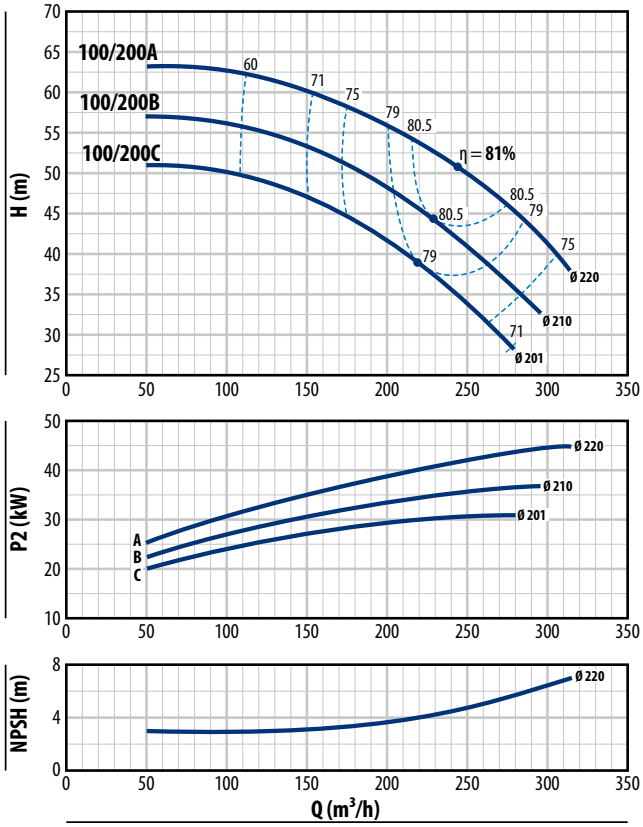

FG2-100/250

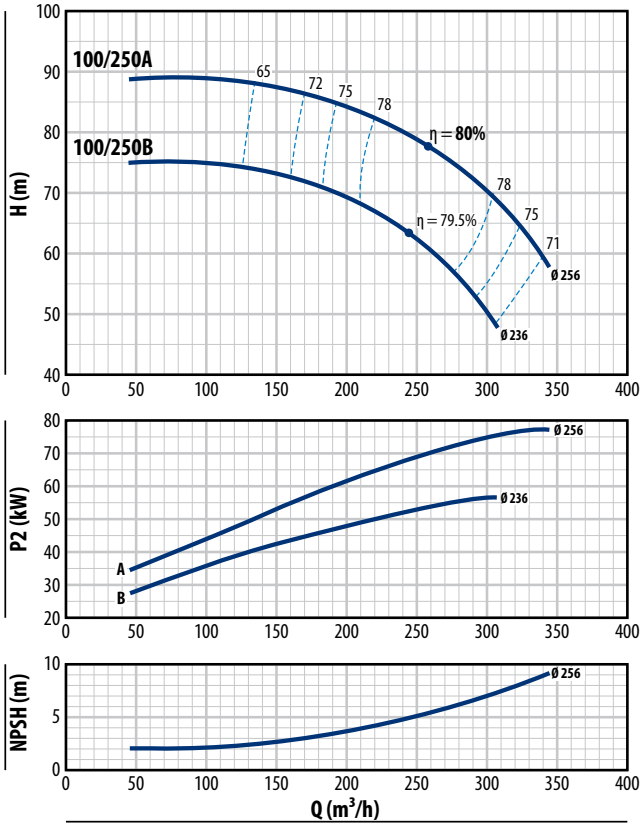

FG4

PERFORMANCE RANGE – n= 1750 min^{-1}

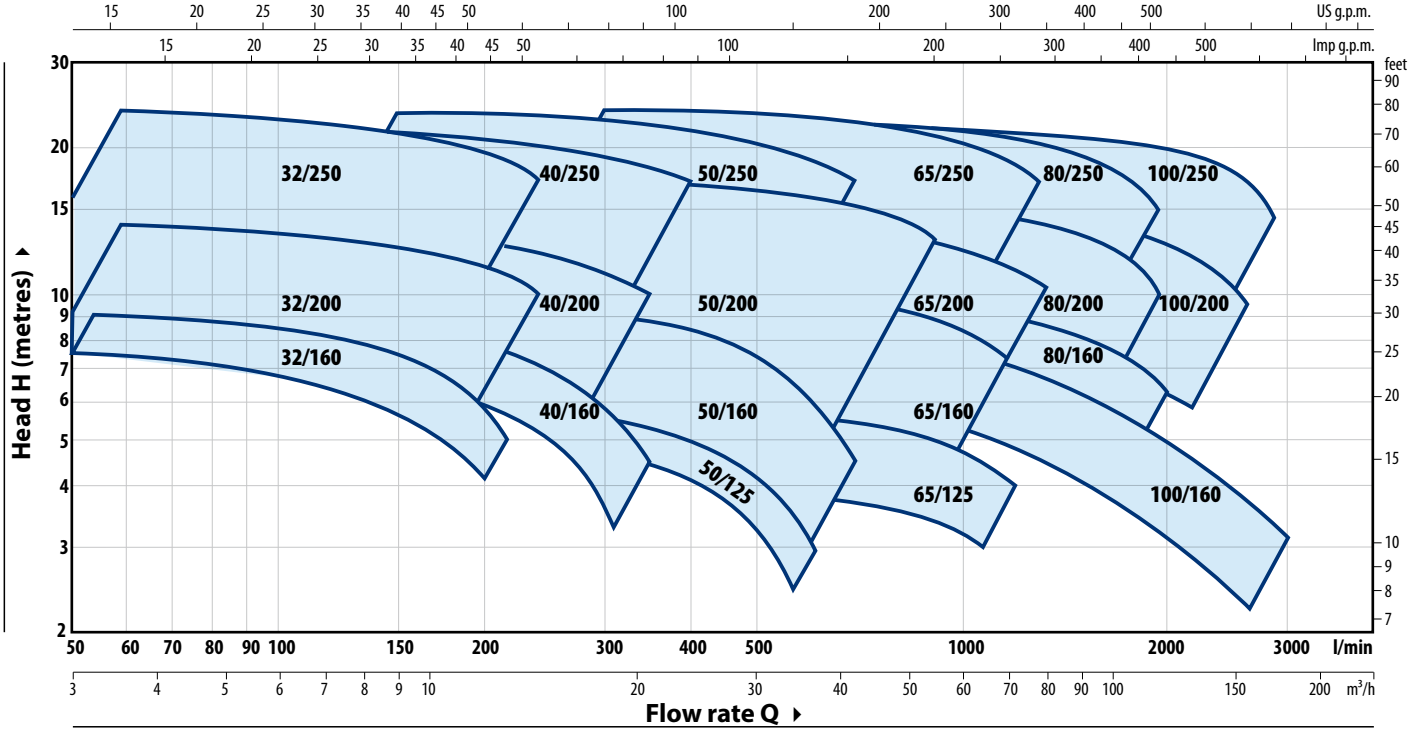

PERFORMANCE DATA – n= 1750 min^{-1}

TYPE	MOTOR TO BE COUPLED		PERFORMANCE n= 1750 min^{-1}	
	kW	HP	Q m^3/h	H m
FG4-32/160C	0.25	0.33	3 – 10.5	6 – 3.5
FG4-32/160B	0.37	0.5	3 – 12	7.5 – 4
FG4-32/160A	0.37	0.5	3 – 13.5	9 – 6
FG4-32/200C	0.55	0.75	3 – 13.5	11 – 8
FG4-32/200B	0.75	1	3 – 15	12.5 – 9
FG4-32/200A	1.1	1.5	3 – 15	14 – 11
FG4-32/200BH	0.55	0.75	3 – 9	11 – 9
FG4-32/200AH	0.55	0.75	3 – 9.6	13.8 – 11
FG4-32/250C	1.1	1.5	3 – 13.2	18.4 – 15
FG4-32/250B	1.5	2	3 – 15	21.7 – 17.4
FG4-32/250A	2.2	3	3 – 16.2	23.8 – 18.7
FG4-40/160C	0.37	0.5	3 – 18	6.5 – 3.5
FG4-40/160B	0.37	0.5	3 – 18	8 – 5
FG4-40/160A	0.55	0.75	3 – 21	9.5 – 5
FG4-40/200B	0.75	1	3 – 21	11.5 – 7
FG4-40/200A	1.1	1.5	3 – 21	13.5 – 10
FG4-40/250C	1.1	1.5	3 – 21	16 – 11.5
FG4-40/250B	1.5	2	3 – 21	17.5 – 13.5
FG4-40/250A	2.2	3	3 – 21	22 – 18
FG4-50/125C	0.37	0.5	9 – 36	4.3 – 1.5
FG4-50/125B	0.55	0.75	9 – 36	5.1 – 2.3
FG4-50/125A	0.55	0.75	9 – 36	5.8 – 3.2
FG4-50/160C	0.55	0.75	9 – 30	7 – 4
FG4-50/160B	0.75	1	9 – 33	8 – 5
FG4-50/160A	1.1	1.5	9 – 33	9 – 7
FG4-50/200C	1.5	2	12 – 51	11 – 7.5
FG4-50/200B	2.2	3	12 – 51	13 – 9.5
FG4-50/200A	2.2	3	12 – 54	15 – 11
FG4-50/200AR	3	4	12 – 54	17 – 13
FG4-50/250D	1.1	1.5	9 – 27	12.5 – 8
FG4-50/250C	1.5	2	9 – 27	14.5 – 10.5
FG4-50/250B	2.2	3	9 – 30	18 – 14.5
FG4-50/250A	2.2	3	9 – 30	21 – 18
FG4-50/250AR	3	4	9 – 30	24 – 21

TIPO	MOTORE DA ACCOPPIARE		PRESTAZIONI n= 1750 min^{-1}	
	kW	HP	Q m^3/h	H m
FG4-65/125C	0.55	0.75	18 – 54	4 – 2.7
FG4-65/125B	0.75	1	18 – 60	4.5 – 3.2
FG4-65/125A	1.1	1.5	18 – 66	5.8 – 4.5
FG4-65/160C	1.1	1.5	18 – 66	8 – 5.5
FG4-65/160B	1.5	2	18 – 72	9 – 5.5
FG4-65/160A	2.2	3	18 – 72	10 – 7
FG4-65/200B	2.2	3	6 – 72	10.5 – 7.3
FG4-65/200A	2.2	3	6 – 75	12 – 8.5
FG4-65/200AR	3	4	6 – 78	14 – 10
FG4-65/250C	3	4	12 – 70.5	19 – 13
FG4-65/250B	4	5.5	12 – 75	21.5 – 15.5
FG4-65/250A	5.5	7.5	12 – 78	23.5 – 17
FG4-80/160D	1.5	2	15 – 120	6 – 2.5
FG4-80/160C	2.2	3	15 – 120	7.5 – 3.5
FG4-80/160B	2.2	3	15 – 120	8.5 – 5
FG4-80/160A	3	4	15 – 120	10 – 6
FG4-80/200B	4	5.5	15 – 109.5	14 – 8.5
FG4-80/200A	5.5	7.5	15 – 117	15.5 – 10
FG4-80/250B	5.5	7.5	18 – 108	19 – 13.5
FG4-80/250A	7.5	10	18 – 117	22 – 15
FG4-100/160A	3	4	24 – 168	9.5 – 3.8
FG4-100/200C	4	5.5	24 – 139.5	12.5 – 7
FG4-100/200B	5.5	7.5	24 – 147	14 – 8
FG4-100/200A	5.5	7.5	24 – 157.5	15.5 – 9.5
FG4-100/250B	7.5	10	24 – 154.5	18.5 – 12
FG4-100/250A	9.2	12.5	24 – 172.5	22 – 14.5

Q = Flow Rate

H = Total manometric head

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

CHARACTERISTIC CURVES

n= 1750 min^{-1}

FG4-32/160

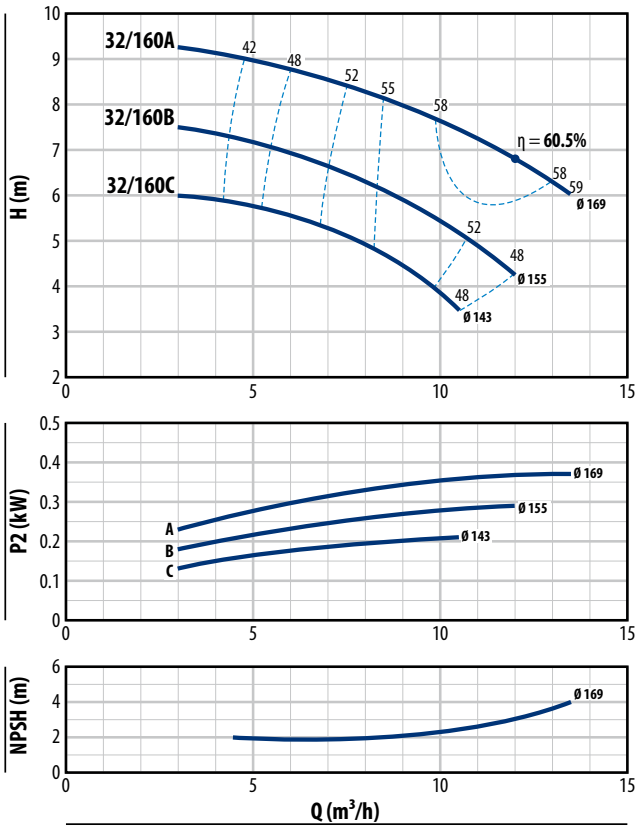

FG4-32/200

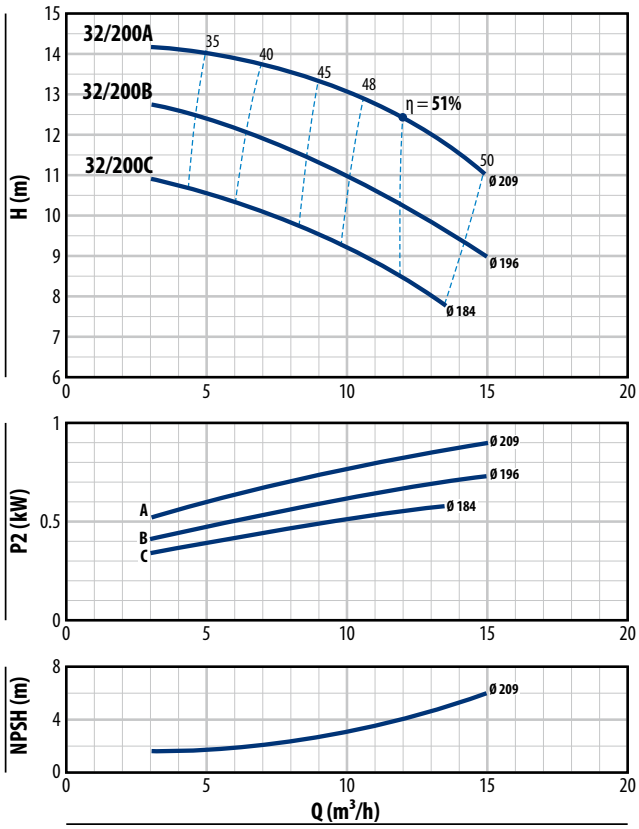

FG4-32/200H

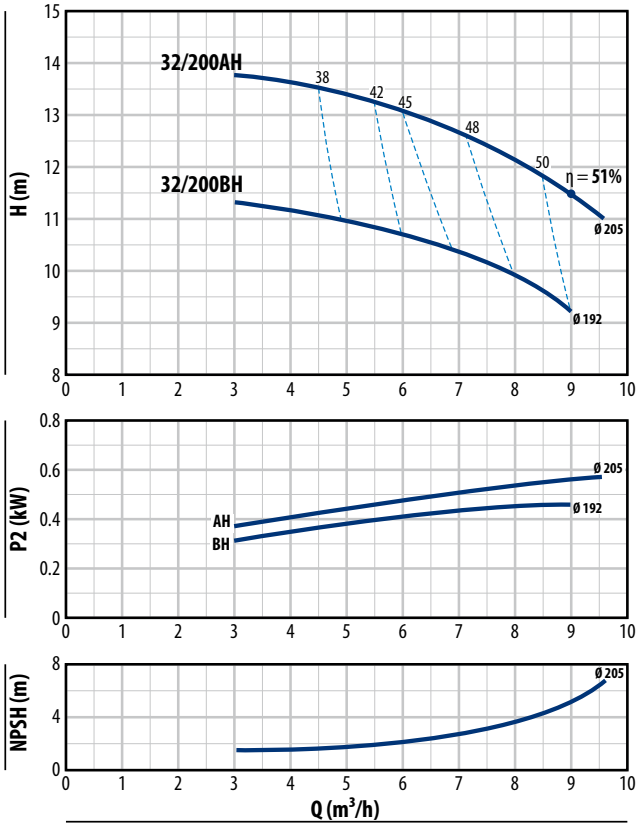

FG4-32/250

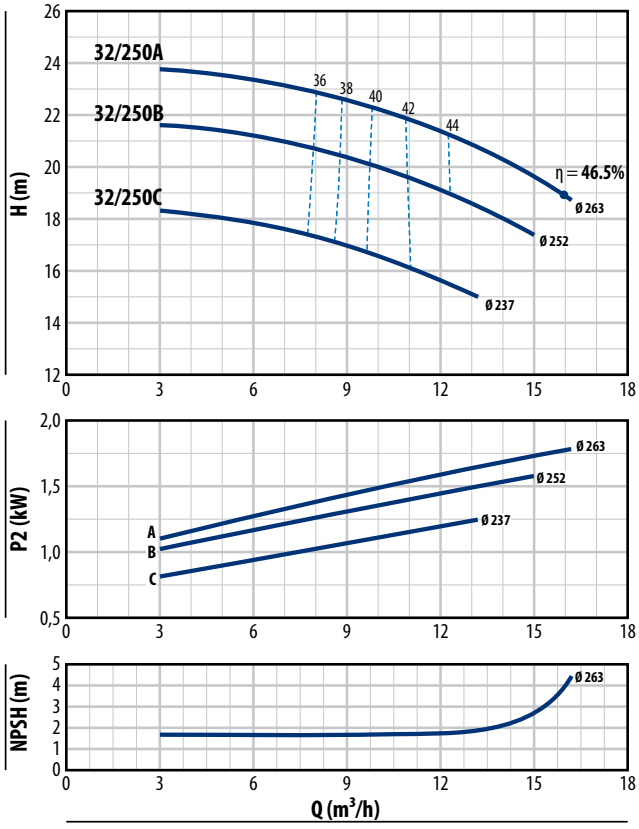

CHARACTERISTIC CURVES

n= 1750 min^{-1}

FG4-40/160

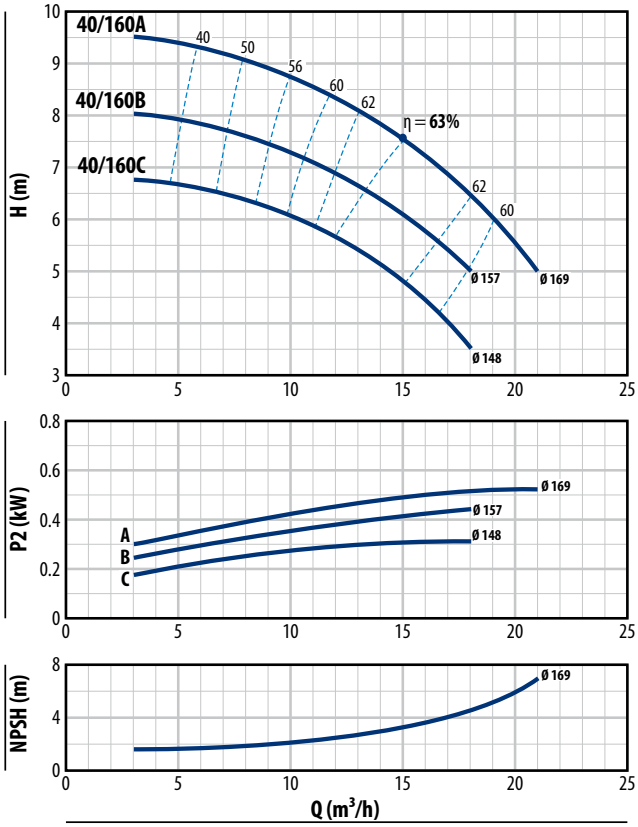

FG4-40/200

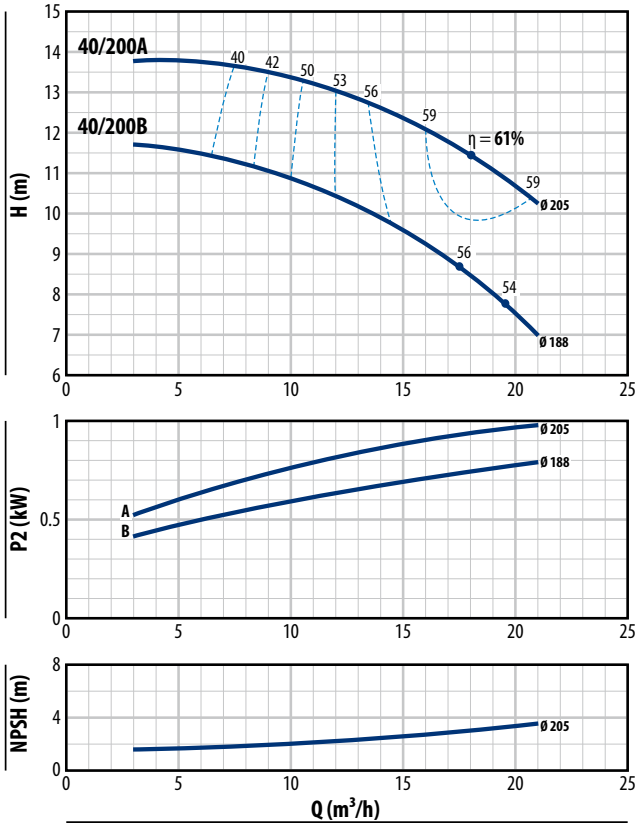

FG4-40/250

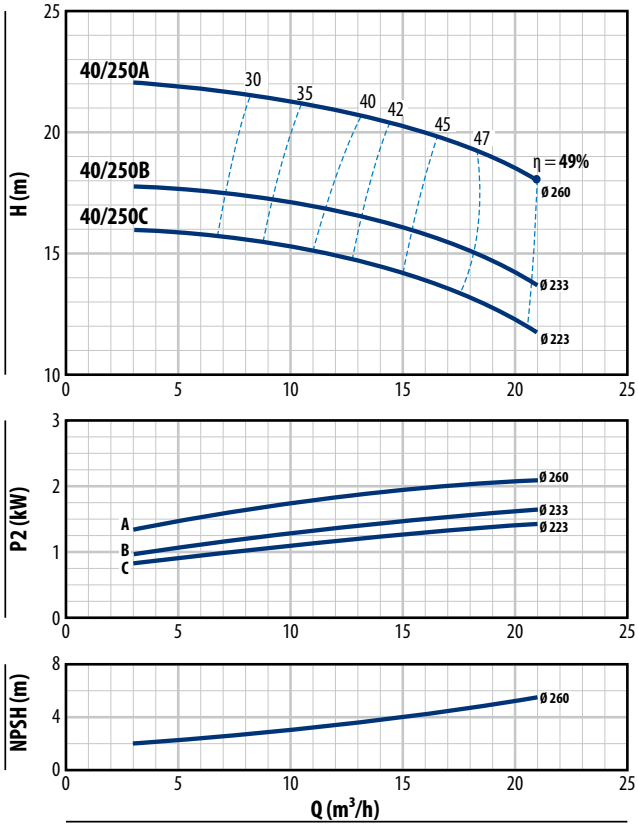

CHARACTERISTIC CURVES

n= 1750 min^{-1}

FG4-50/125

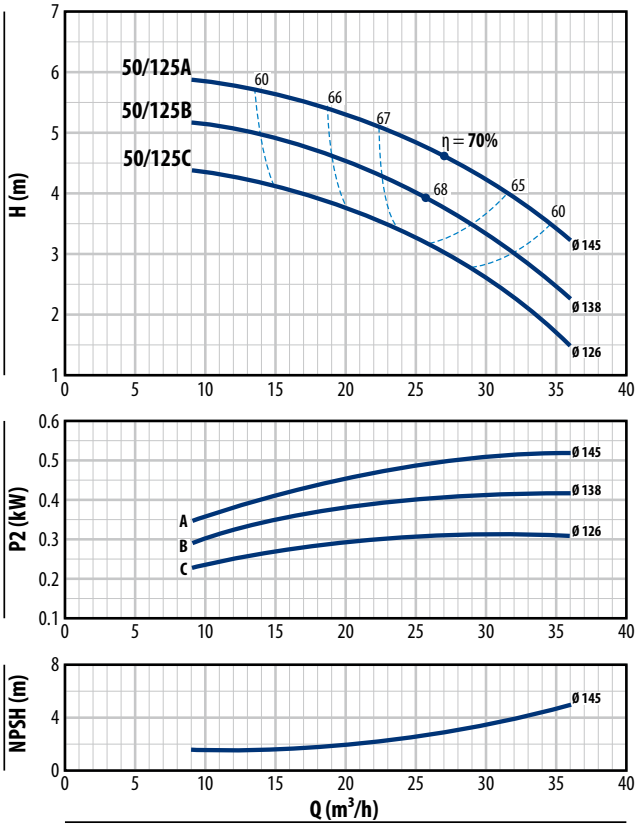

FG4-50/160

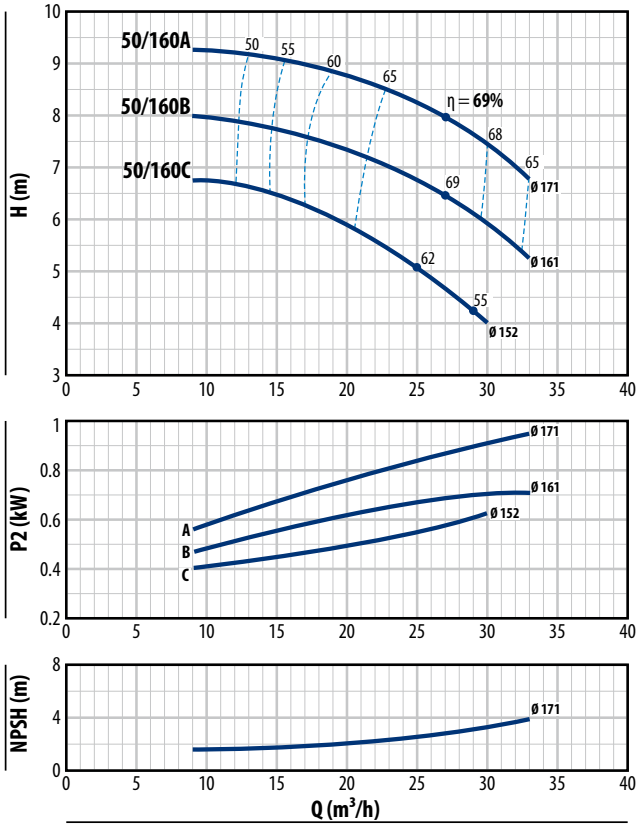

FG4-50/200

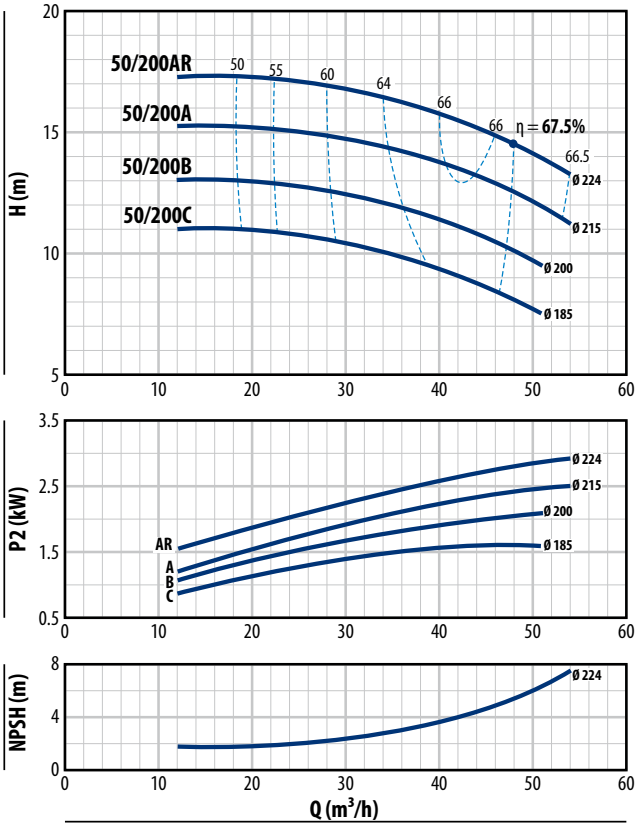

FG4-50/250

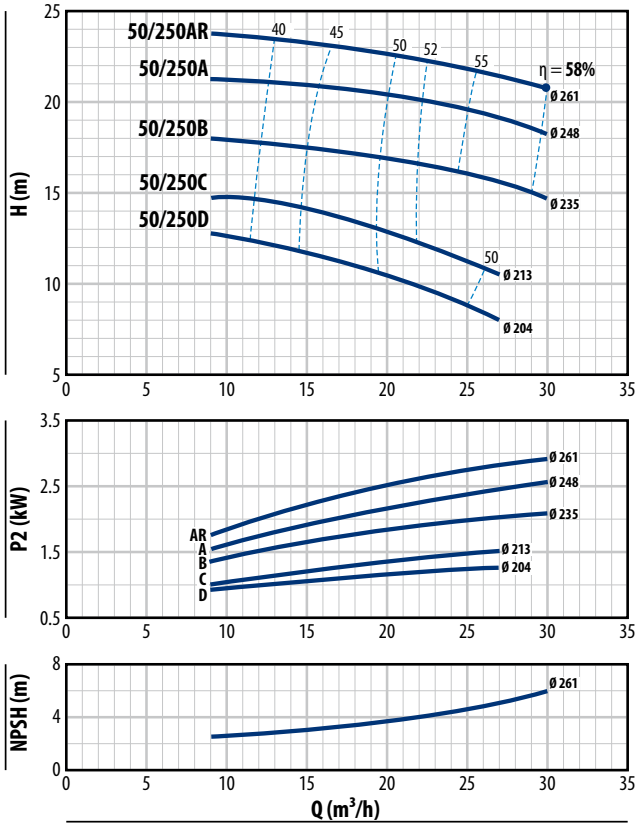

CHARACTERISTIC CURVES

n= 1750 min^{-1}

FG4-65/125

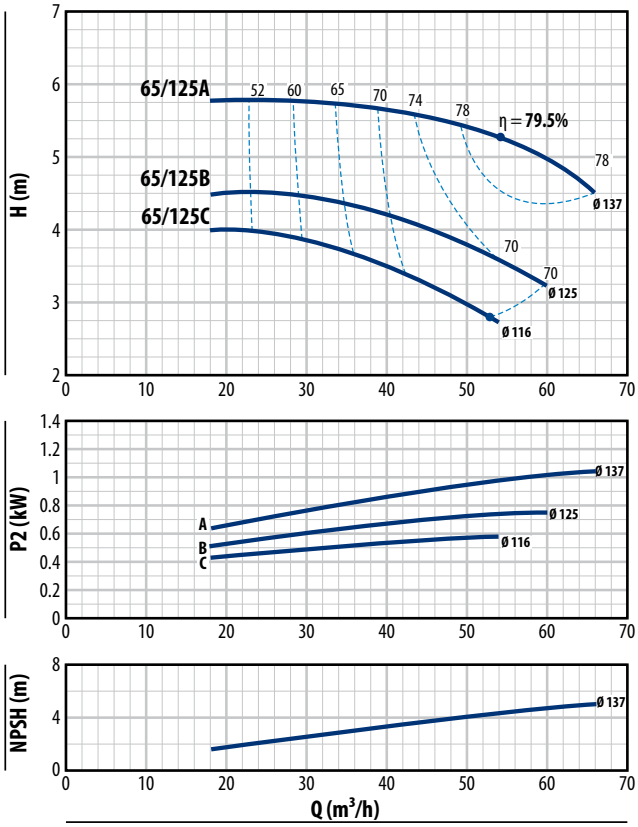

FG4-65/160

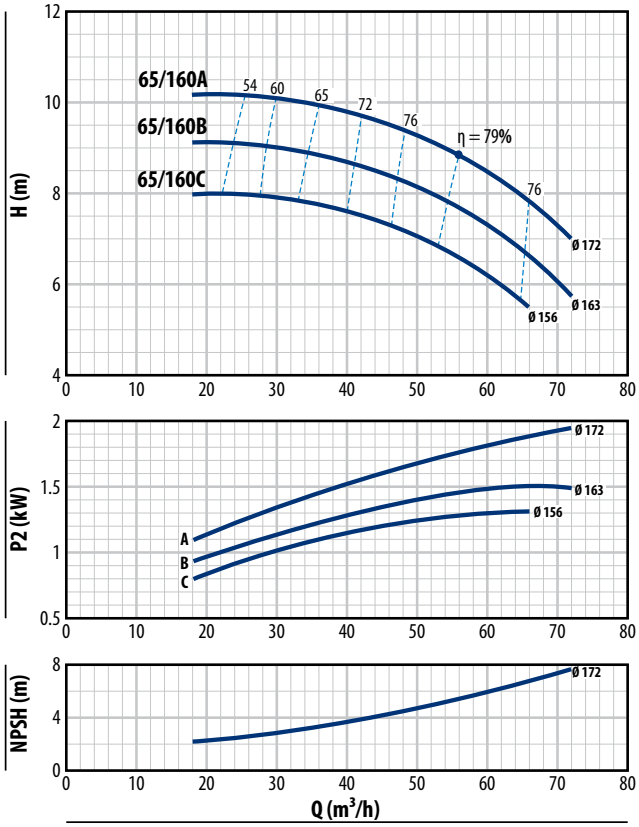

FG4-65/200

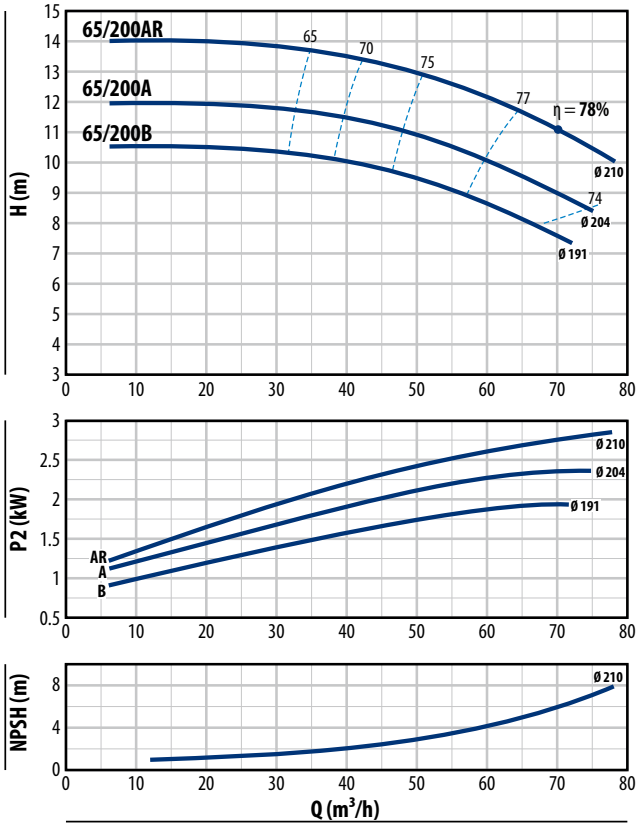

FG4-65/250

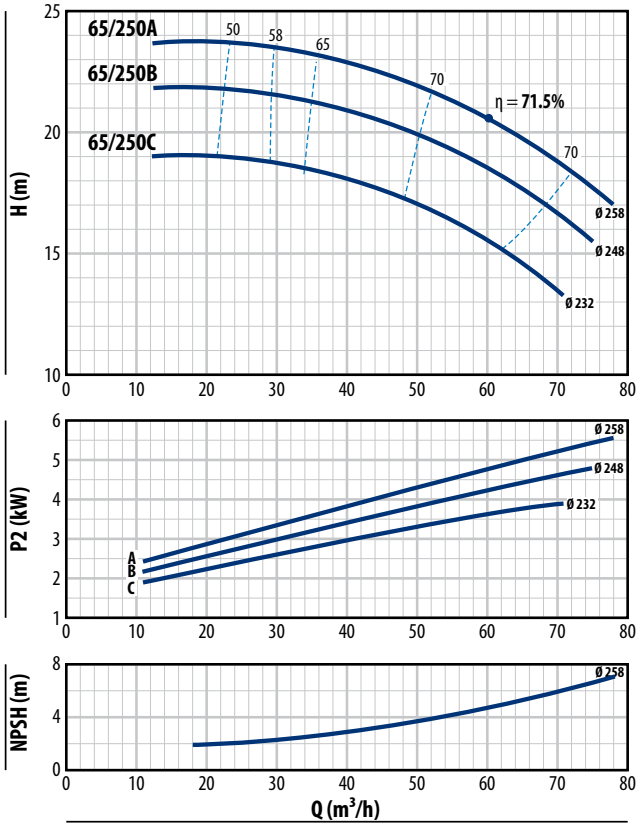

CHARACTERISTIC CURVES

n= 1750 min^{-1}

FG4-80/160

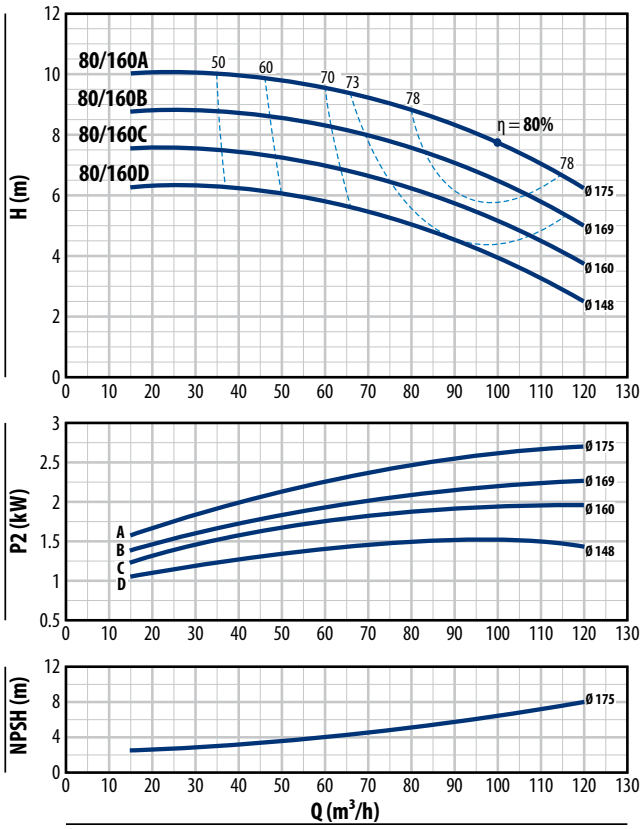

FG4-80/200

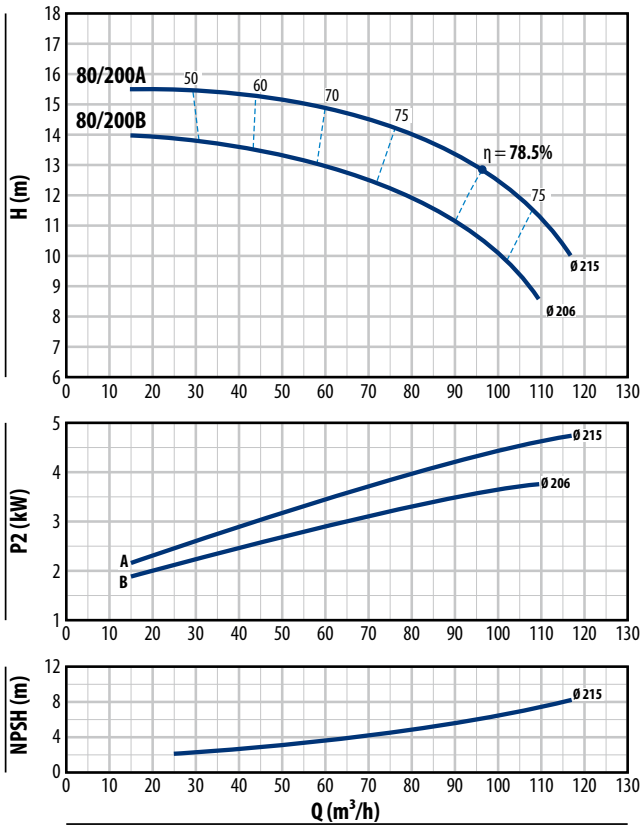

FG4-80/250

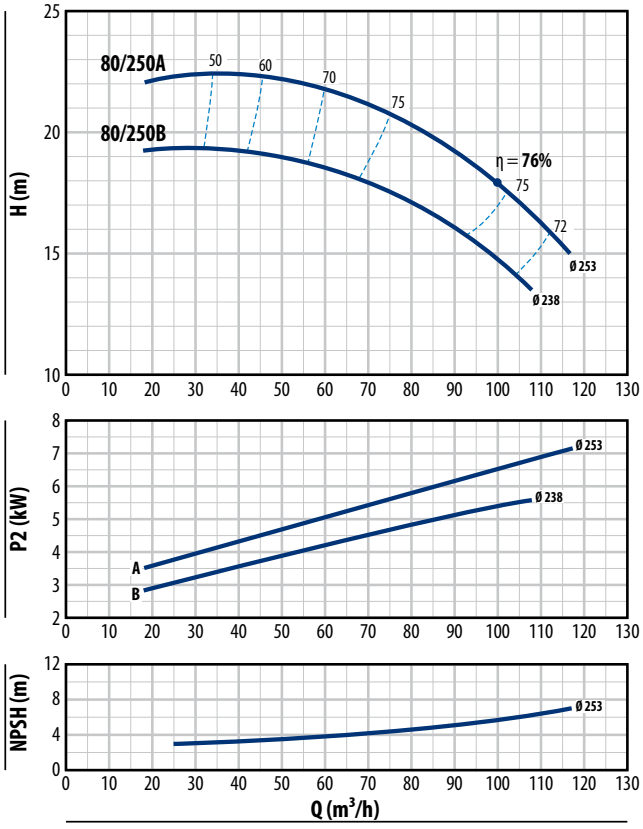

CHARACTERISTIC CURVES

n= 1750 min^{-1}

FG4-100/160

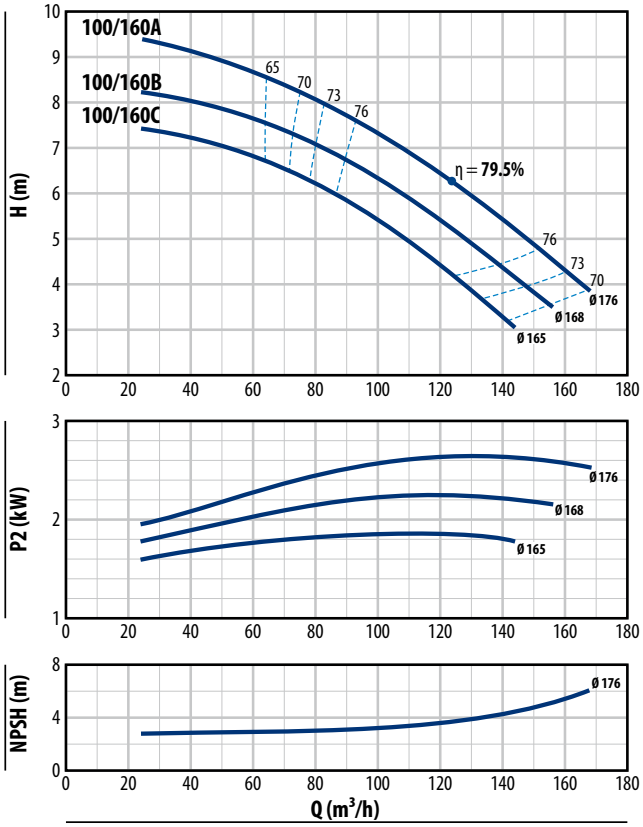

FG4-100/200

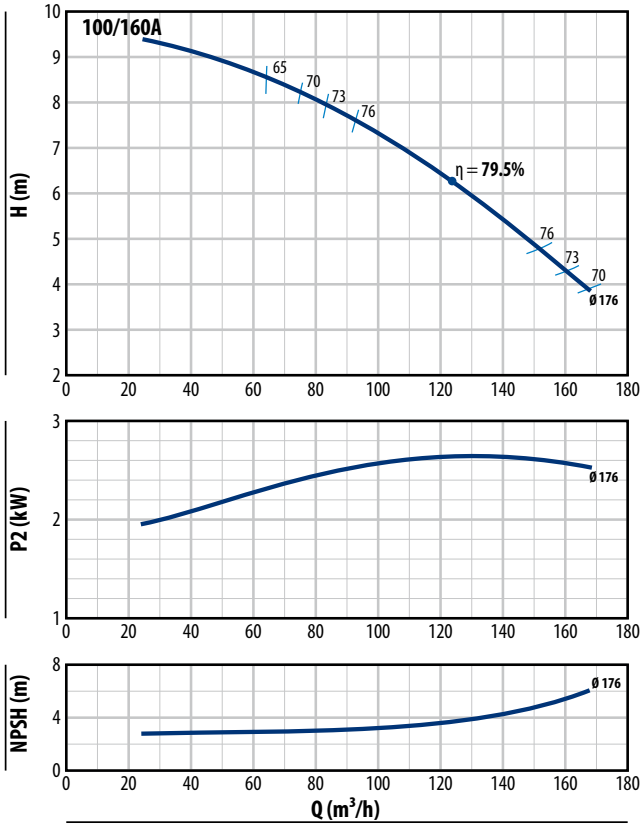
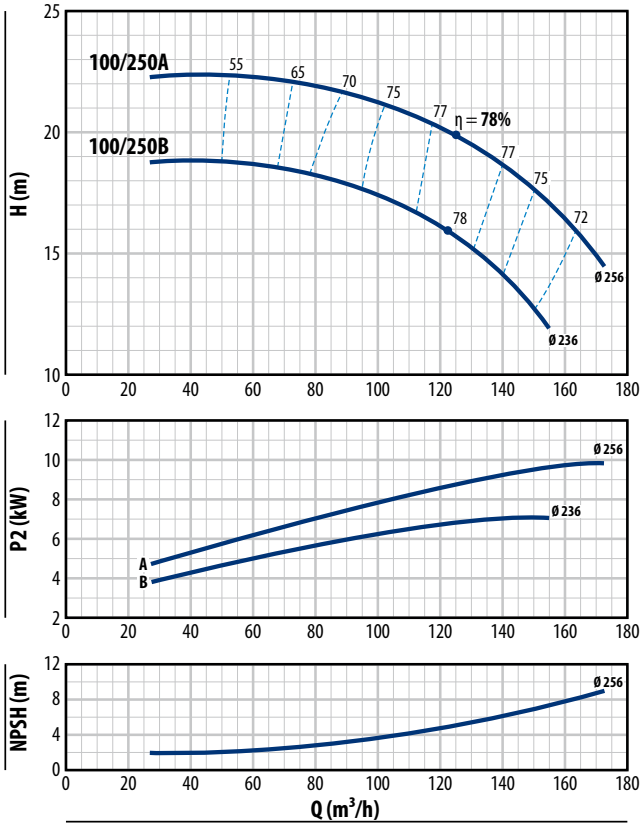
FG4-100/250