



※ New version featuring a 20% reduction in noise levels.



PERFORMANCE RANGE

- Flow rate up to **90 l/min** (5.4 m³/h)
- Head up to **100 m**

INSTALLATION AND USE

Designed to transfer clean water free from abrasive particles and liquids that will not damage the pump's components.

Reliable, easy to operate, and cost-effective. They are ideal for domestic applications, specifically for gardens and orchards, in combination with small autoclave tanks.

APPLICATION LIMITS

- Manometric suction head up to **8 m**
- Liquid temperature between **-10 °C** and **+60 °C**
- Ambient temperature up to **+40 °C**
- Maximum working pressure:
 - **6 bar** for PK 65
 - **7 bar** for PK 80
 - **10 bar** for PK 90, PK 100, PK 200, PK 300

AVAILABLE UPON REQUEST


- ※ Mechanical seal options available
- ※ Protection rating IPX5 for PK 80-90-100-200-300
- ※ Different voltage or frequency

PATENTS - TRADE MARKS - MODELS

- Motor bracket: Patent No. IT1243605
- Pump body: Patent No. 0000275946 (PK65)

CURVES AND PERFORMANCE DATA – HS=0 m

60 Hz

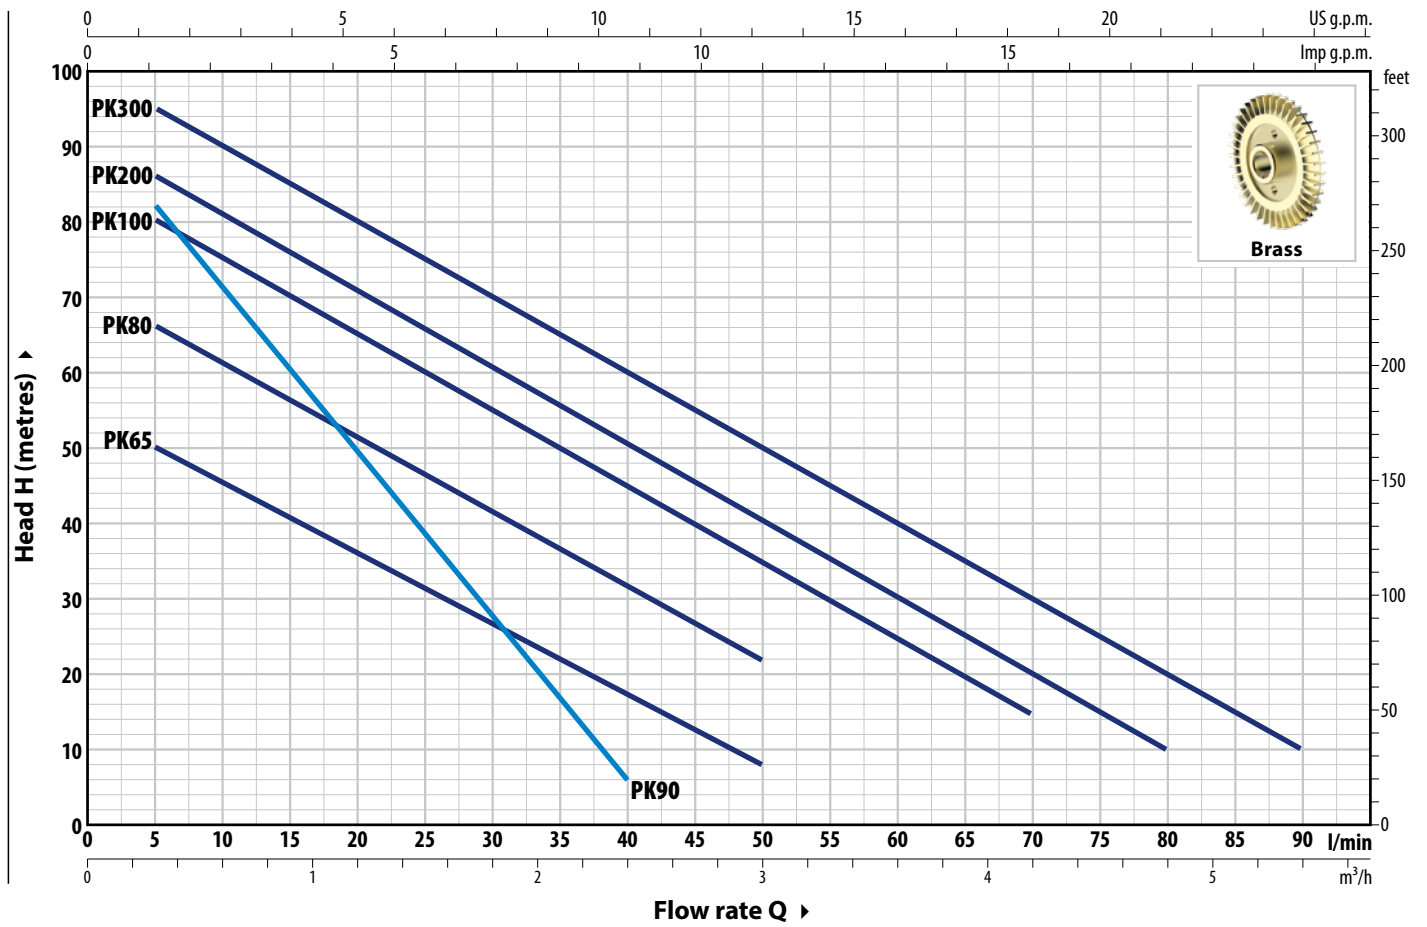

TYPE		POWER (P ₂)		3~	Q	Flow rate																		
Single-ph.	Three-ph.	kW	HP			Q	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	3.0	3.6	4.2	4.8	5.4				
					l/min	0	5	10	15	20	25	30	35	40	50	60	70	80	90					
PKm 65	PK 65	0.55	0.75	IE2	H m	55	50	45.5	40.5	36	31	27	22	17	8									
PKm 80	PK 80	0.75	1	IE3		70	66	61	56	51	46	41	36.5	31	22									
PKm 90	PK 90	0.75	1			90	82	71	60	49	38	27	17	5										
PKm 100	PK 100	1.1	1.5	85		80	75	70	65	60	55	50	45	35	24.5	15								
PKm 200	PK 200	1.5	2	90		86	81	76	71	65.5	60	55	50	40	30	20	10							
PKm 300	PK 300	2.2	3	100		95	90	85	80	75	70	65	60	50	40	30	20	10						

Q = Flow rate H = Total manometric head HS = Suction height



Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

ABSORPTION

TYPE	VOLTAGE	
	220 V	110 V
PKm 65	5.8 A	11.5 A
PKm 80	6.5 A	13.0 A
PKm 90	6.0 A	12.0 A
PKm 100	9.0 A	-
PKm 200	12.0 A	-
PKm 300	12.5 A	-

TYPE	VOLTAGE			
	220 V - Δ	380 V - Δ	220 V - Δ	440 V - Δ
PK 65	3.2 A	1.85 A	3.5 A	2.0 A
PK 80	3.8 A	2.2 A	4.3 A	2.4 A
PK 90	4.2 A	2.4 A	4.2 A	2.4 A
PK 100	6.2 A	3.6 A	6.2 A	3.15 A
PK 200	9.5 A	5.6 A	7.0 A	4.2 A
PK 300	10.0 A	5.8 A	8.2 A	4.8 A

DIMENSIONS AND WEIGHT

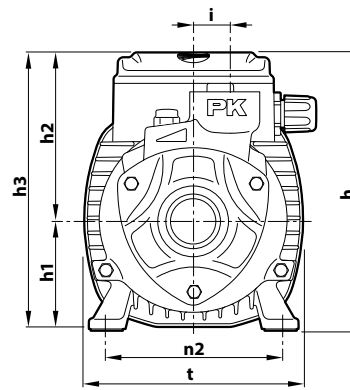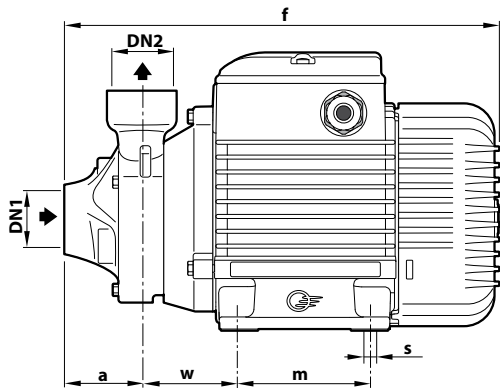

TYPE		PORTS		DIMENSIONS mm											kg			
Single-ph.	Three-ph.	DN1	DN2	a	f	h	h1	h2	h3	i	m	t	n2	w	s	1~	3~	
PKm 65	PK 65	1"	1"	38	237	153	63	75	138	20	80	120	100	53	7	6.9	6.3	
PKm 80	PK 80			55	285	179 ^(*)	71	85	156		90	140	112	62		10.3	10.3	
PKm 90	PK 90	3/4"	3/4"	46	278			84	155	19						10.3	10.3	
PKm 100	PK 100	1"	1"		356		80	88	168	19	100	152	125	95	9	15.1	15.1	
PKm 200	PK 200			62													16.3	16.3
PKm 300	PK 300				376												18.1	18.1

^(*) h=199 mm for single-phase 110V versions

PALLET CAPACITY

TYPE		GROUPAGE	CONTAINER
Single-ph.	Three-ph.	n. pumps	n. pumps
PKm 65	PK 65	189	243
PKm 80	PK 80	102	170
PKm 90	PK 90	102	170
PKm 100	PK 100	72	96
PKm 200	PK 200	72	96
PKm 300	PK 300	72	96

CONSTRUCTION FEATURES

1 Pump body Cast iron with ISO 228/1 threaded ports

2 Motor bracket Aluminum with brass cover and front scraping anti-locking function (patented)

3 Impeller Brass, radial peripheral vane type

4 Mechanical seal	Pump	Seal	Shaft	Materials
	PK 60-65-80	AR-12	Ø 12 mm	Ceramic / Graphite / NBR
	PK 90	ST1-12	Ø 12 mm	Silicon carbide / Graphite / NBR
	PK 100-200-300	FN-14	Ø 14 mm	Graphite / Ceramic / NBR

5 Motor shaft Stainless steel **AISI 431**
(EN 10088-3 - 1.4104 for PK 60, PK 65)

6 Electric motor

PKm: single-phase 220 V - 60 Hz with winding integrated thermal motor protection.
PK: three-phase 220/380 V - 60 Hz or 220/440 V - 60 Hz

- The three-phase pumps are fitted with high performance motors up to P2=0.55 kW in class **IE2** and from P2=0.75 kW in class **IE3** (IEC 60034-30-1)
- Continuous running duty **S1**
- Insulation: class F
- Protection rating: IPX4

